

GENERAL SUMMARY

Project Name: MECHANIC SHOP 2317 WEST ARKANSAS LANE
Project ID: 1005-02
Scope: G.C.
No. Of Floors: 2
Date: 8-May-24



BUILDING GSF		5,789	
DIVISION NO.	DESCRIPTION	TOTAL DIV. COST	TOTAL DIV. COST (PER SF)
1000	GENERAL REQUIREMENTS	\$ 44,600	\$ 7.70
2000	CONCRETE	\$ 178,534	\$ 30.84
5000	METALS	\$ 52,718	\$ 9.11
6000	WOOD, PLASTIC & COMPONENTS	\$ 61,888	\$ 10.69
7000	THERMAL AND MOISTURE PROTECTION	\$ 43,658	\$ 7.54
8000	OPENINGS	\$ 108,171	\$ 18.69
9000	FINISHES	\$ 47,088	\$ 8.13
11000	SPECIALITIES	\$ 2,692	\$ 0.47
12000	FURNISHES		\$ -
22000	PLUMBING	\$ 21,501	\$ 3.71
23000	HVAC	\$ 21,271	\$ 3.67
26000	ELECTRICAL	\$ 22,137	\$ 3.82
31000	EARTHWORK	\$ 25,668	\$ 4.43
32000	EXTERIOR IMPROVEMENTS	\$ 13,035	\$ 2.25
TOTAL TRADE COST		\$ 642,960	\$ 109
OVERHEAD AND PROFIT		15%	\$ 96,443.99
INSURANCE		3%	\$ 19,289
CONTINGENCY		5%	\$ 32,148
TAX		9.5%	\$ 61,081
SUGGESTED BID		\$ 851,922	\$ 144.18

DETAILED BREAKDOWN OF ITEMS														
Project Name		MECHANIC SHOP 2317 WEST ARKANSAS LANE												
Project ID:		1005-02												
Scope:		G.C.												
														
												Date:	8-May-24	
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
GENERAL REQUIREMENTS														
1			Permits	LS	1	0%	1	40.000	\$ 40.00	\$ 1,600.00	\$ -	\$ 1,600.00	\$ 1,600	
2			Supervision and Coordination	LS	1	0%	1	350.000	\$ 40.00	\$ 14,000.00	\$ -	\$ 14,000.00	\$ 14,000	
3			Submittals and Shop drawings	LS	1	0%	1	0.000	\$ 40.00	\$ -	\$ -	\$ -	\$ -	
4			Final Cleaning	LS	1	0%	1	50.000	\$ 40.00	\$ 2,000.00	\$ -	\$ 2,000.00	\$ 2,000	
5			Mobilization Costs	LS	1	0%	1	200.000	\$ 40.00	\$ 8,000.00	\$ -	\$ 8,000.00	\$ 8,000	
6			Temporary Control & Facilities	LS	1	0%	1	275.000	\$ 40.00	\$ 11,000.00	\$ -	\$ 11,000.00	\$ 11,000	
7			Scaffolding	LS	1	0%	1	200.000	\$ 40.00	\$ 8,000.00	\$ -	\$ 8,000.00	\$ 8,000	
												SUBTOTAL	\$ 44,600	
CONCRETE														
			FOOTINGS											
8	A102	Plan Notes	Mat Footing reinf. w/ #5 @ 18" o.c. Each Way T&B Size: 114'-4"x54'-3" Reinforcement Assumed	CY	458	10%	504	2.400	\$ 48.75	\$ 117.00	\$ 235.00	\$ 352.00	\$ 177,467	
			REBARS											
9			#5 Bar	LBS	567	10%	624	0.015	\$ 48.75	\$ 0.73	\$ 0.98	\$ 1.71	\$ 1,067	
												SUBTOTAL	\$ 178,534	
METAL														
10	A102	Plan Notes	1/2" dia anchor bolt	EA	36	0%	36	0.116	\$ 47.38	\$ 5.50	\$ 5.88	\$ 11.38	\$ 410	
11			3/4" Dia Anchor Bolt	EA	32	0%	32	0.116	\$ 47.38	\$ 5.50	\$ 9.13	\$ 14.63	\$ 468	
12			5/8" Dia Anchor bolt	EA	20	0%	20	0.116	\$ 47.38	\$ 5.50	\$ 7.29	\$ 12.79	\$ 256	
13			100 X 50 X 5 X 7MM, 15'-9"H	LBS	301	10%	331	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 892	
14			100 X 50 X 5 X 7MM, 23'-10"H	LBS	455	10%	500	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 1,349	
15			100 X 100 X 6 X 8MM, 20'-9"H	LBS	714	10%	785	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 2,118	
16			125 X 60 X 6 X 8MM, 18'-9"H	LBS	645	10%	710	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 1,914	
17			125 X 125 X 6.5 X 9MM, 15'-9"H	LBS	750	10%	825	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 2,225	
18			125 X 125 X 6.5 X 9MM, 23'-10"H	LBS	1134	10%	1248	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 3,366	
19			150 X 150 X 7 X 10MM, 23'-10"H	LBS	1520	10%	1672	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 4,511	
20			50 X 150 X 7 X 10MM, 15'-9"H	LBS	1005	10%	1105	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 2,982	
21			50 X 150 X 7 X 10MM, 15'-9"H	LBS	4019	10%	4421	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 11,927	
22			50 X 150 X 7 X 10MM, 23'-10"H	LBS	6842	10%	7526	0.020	\$ 47.38	\$ 0.95	\$ 1.75	\$ 2.70	\$ 20,301	
												SUBTOTAL	\$ 52,718	
WOOD, PLASTIC & COMPOSITES														
			FRAMING											
23	A112	Plan Notes	2x6 Stud @ 16" o.c. @ Roof	SF	6278	10%	6906	0.031	\$ 43.32	\$ 1.34	\$ 1.17	\$ 2.51	\$ 17,322	
			SHEATHING											
24			3/4" OSB Sheathing @ Roof	SF	6278	10%	6906	0.020	\$ 43.32	\$ 0.87	\$ 1.32	\$ 2.19	\$ 15,099	
25			1/2" CDX Plywood Sheathig @ Wall	SF	13285	10%	14614	0.020	\$ 43.32	\$ 0.87	\$ 1.15	\$ 2.02	\$ 29,467	
												SUBTOTAL	\$ 61,888	
THERMAL AND MOISTURE PROTECTION														
			EXTERIOR FINISHES											
26			Corrugated Metal @ walls	SF	304	10%	334	0.045	\$ 41.50	\$ 1.85	\$ 3.75	\$ 5.60	\$ 1,872	

DETAILED BREAKDOWN OF ITEMS

Project Name MECHANIC SHOP 2317 WEST ARKANSAS LANE

Project ID: 1005-02

Scope: G.C.




Date: 8-May-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
27	A110	Plan Notes	Corrugated Metal @ Roof	SF	6278	10%	6906	0.050	\$ 41.50	\$ 2.08	\$ 3.92	\$ 6.00	\$ 41,400
28			Alum. Metal Gutter	LF	26	10%	29	0.058	\$ 41.50	\$ 2.41	\$ 7.21	\$ 9.62	\$ 279
29			Downspout	LF	12	10%	13	0.055	\$ 41.50	\$ 2.28	\$ 5.88	\$ 8.16	\$ 108
SUBTOTAL												\$ 43,658	

OPENINGS													
			DOORS										
30	A102		Garrade Door High Lift Size: 12'-0"x10'-0"	EA	3	0%	3	17.800	\$ 52.34	\$ 931.65	\$ 8,928.00	\$ 9,859.65	\$ 29,579
31			Garrade Door High Lift Size: 14'-0"x14'-0"	EA	1	0%	1	29.200	\$ 52.34	\$ 1,528.33	\$ 14,602.00	\$ 16,130.33	\$ 16,130
32			Garrade Door Low Lift Size: 12'-0"x10'-0"	EA	4	0%	4	17.800	\$ 52.34	\$ 931.65	\$ 8,940.00	\$ 9,871.65	\$ 39,487
33			Single Hinged Wood Door Size: 3'-0"x7'-0"	EA	12	0%	12	5.460	\$ 52.34	\$ 285.78	\$ 682.50	\$ 968.28	\$ 11,619
			HARDWARES										
34			Typical Door Hardware	EA	20	0%	20	2.250	\$ 52.34	\$ 117.77	\$ 450.00	\$ 567.77	\$ 11,355
												SUBTOTAL	\$ 108,171

FINISHES													
DRYWALL													
35	A102	Plan Notes	Wall Type-A	LF	175	10%	193						
			One Layer of 5/8" Gypsum Board on Single Side	SF	1842								
36			No of Sheets (4x8)	EA	63	0%	63	0.384	\$ 41.50	\$ 15.94	\$ 18.56	\$ 34.50	\$ 2,184
37			Tapping	LF	921	10%	1013	0.007	\$ 41.50	\$ 0.29	\$ 0.02	\$ 0.31	\$ 315
38			Mudding	LBS	96	10%	105	0.085	\$ 41.50	\$ 3.53	\$ 0.50	\$ 4.03	\$ 424
39			Screws	EA	3039	0%	3039	0.002	\$ 41.50	\$ 0.08	\$ 0.03	\$ 0.11	\$ 343
40			2x6 Top double plate, 10'L	EA	35	10%	39	0.380	\$ 41.50	\$ 15.77	\$ 15.50	\$ 31.27	\$ 1,207
41			2x6 Bottom Single plate, 10'L	EA	18	10%	19	0.380	\$ 41.50	\$ 15.77	\$ 15.50	\$ 31.27	\$ 603
42			Sealant @ All Penetrations	LF	7368	10%	8105	0.014	\$ 41.50	\$ 0.58	\$ 0.15	\$ 0.73	\$ 5,925
43			Wall Type-B	LF	50	10%	55						
			One Layer of 5/8" Gypsum Board on Single Side	SF	797				\$ 41.50				
44			No of Sheets (4x8)	EA	27	0%	27	0.384	\$ 41.50	\$ 15.94	\$ 18.56	\$ 34.50	\$ 945
45			Tapping	LF	399	10%	438	0.007	\$ 41.50	\$ 0.29	\$ 0.02	\$ 0.31	\$ 136
46			Mudding	LBS	41	10%	46	0.085	\$ 41.50	\$ 3.53	\$ 0.50	\$ 4.03	\$ 184
47			Screws	EA	1315	0%	1315	0.002	\$ 41.50	\$ 0.08	\$ 0.03	\$ 0.11	\$ 149
48			2x6 Top double plate, 10'L	EA	10	10%	11	0.380	\$ 41.50	\$ 15.77	\$ 15.50	\$ 31.27	\$ 344
49			2x6 Bottom Single plate, 10'L	EA	5	10%	6	0.380	\$ 41.50	\$ 15.77	\$ 15.50	\$ 31.27	\$ 172
50			Sealant @ All Penetrations	LF	3188	10%	3507	0.014	\$ 41.50	\$ 0.58	\$ 0.15	\$ 0.73	\$ 2,563
			FLOOR FINISHES										
51			Sealed concrete	SF	4609	10%	5070	0.035	\$ 43.60	\$ 1.53	\$ 0.90	\$ 2.43	\$ 12,300
52			Tile Flooring	SF	294	10%	323	0.085	\$ 43.60	\$ 3.71	\$ 4.75	\$ 8.46	\$ 2,735
53			Wood Flooring	SF	462	10%	508	0.050	\$ 43.60	\$ 2.18	\$ 4.33	\$ 6.51	\$ 3,308
			BASE FINISHES										
54			Wood Base	LF	140	10%	154	0.035	\$ 39.83	\$ 1.39	\$ 1.92	\$ 3.31	\$ 509
55			Rubber base	LF	300	10%	330	0.032	\$ 39.83	\$ 1.27	\$ 1.65	\$ 2.92	\$ 965
			WALL FINISHES										
56			Paint @ Wall Color: TBD	SF	3397	10%	3737	0.020	\$ 39.83	\$ 0.80	\$ 0.35	\$ 1.15	\$ 4,285
57			Wall tile @ Bathroom	SF	642	10%	706	0.085	\$ 39.83	\$ 3.39	\$ 4.75	\$ 8.14	\$ 5,745

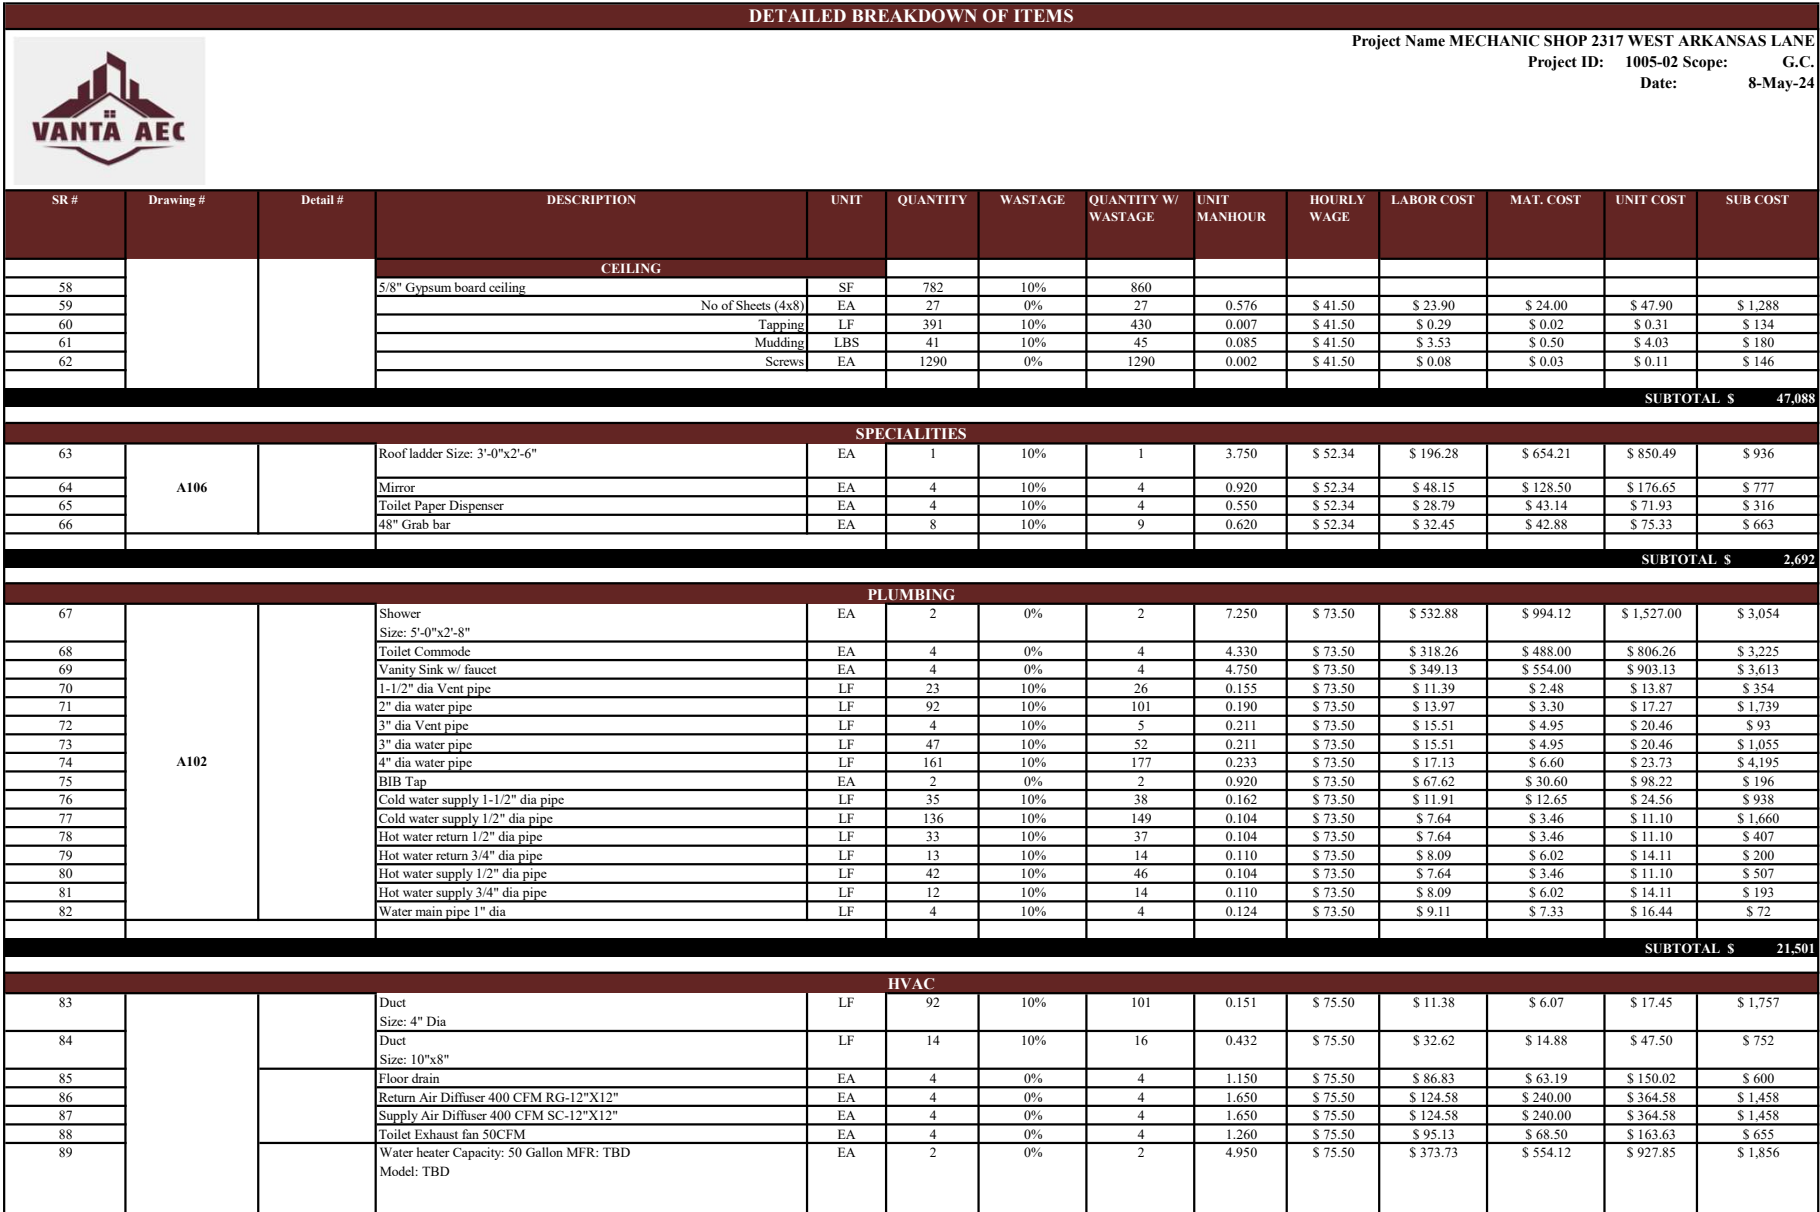

DETAILED BREAKDOWN OF ITEMS															
Project Name		MECHANIC SHOP 2317 WEST ARKANSAS LANE													
Project ID:		1005-02													
Scope:		G.C.													
												Date:		8-May-24	
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST		
90	M100		FCU-01 MFR: Samsung Model: SEZ-KD12NA4 Size: 7-7/8"x39"x27-9/16" Type: MINI DUCTED	EA	1	0%	1	8.900	\$ 75.50	\$ 671.95	\$ 2,426.00	\$ 3,097.95	\$ 3,098		
91			FCU-02 MFR: Samsung Model: SEZ-KD12NA4 Size: 7-7/8"x39"x27-9/16" Type: MINI DUCTED	EA	1	0%	1	8.900	\$ 75.50	\$ 671.95	\$ 2,426.00	\$ 3,097.95	\$ 3,098		
92			FCU-03 MFR: Samsung Model: SEZ-KD12NA4 Size: 7-7/8"x39"x27-9/16" Type: MINI DUCTED.	EA	1	0%	1	8.900	\$ 75.50	\$ 671.95	\$ 2,426.00	\$ 3,097.95	\$ 3,098		
93			FCU-024 MFR: Samsung Model: SEZ-KD12NA4 Size: 7-7/8"x39"x27-9/16" Type: MINI DUCTED	EA	1	0%	1	8.900	\$ 75.50	\$ 671.95	\$ 2,426.00	\$ 3,097.95	\$ 3,098		
94			Water meter	EA	1	0%	1	1.650	\$ 75.50	\$ 124.58	\$ 218.19	\$ 342.77	\$ 343		
												SUBTOTAL	\$ 21,271		
ELECTRICAL															
95	E102,E103	Plan Notes	3 Phase panel-A 200 AMP	EA	1	0%	1	4.660	\$ 74.60	\$ 347.64	\$ 573.84	\$ 921.48	\$ 921		
96			3 Phase panel-B 200 AMP	EA	1	0%	1	4.660	\$ 74.60	\$ 347.64	\$ 573.84	\$ 921.48	\$ 921		
97			6" recessed can incondenscent bulb	EA	22	0%	22	0.648	\$ 74.60	\$ 48.33	\$ 43.19	\$ 91.52	\$ 2,013		
98			Ceiling Mounted Fixture	EA	10	0%	10	1.082	\$ 74.60	\$ 80.70	\$ 72.12	\$ 152.82	\$ 1,528		
99			Flourescent Strip Light	EA	26	0%	26	0.578	\$ 74.60	\$ 43.13	\$ 38.54	\$ 81.67	\$ 2,123		
100			Flourescent Strip Light, 48"L	EA	16	0%	16	0.990	\$ 74.60	\$ 73.85	\$ 66.00	\$ 139.85	\$ 2,238		
101			Flourescent Strip Light, 92"L	EA	9	0%	9	1.898	\$ 74.60	\$ 141.55	\$ 126.50	\$ 268.05	\$ 2,412		
102			GFCI Outlet	EA	35	0%	35	0.676	\$ 74.60	\$ 50.44	\$ 22.54	\$ 72.98	\$ 2,554		
103			Junction box	EA	3	0%	3	0.567	\$ 74.60	\$ 42.30	\$ 18.90	\$ 61.20	\$ 184		
104			Wall Switch	EA	20	0%	20	0.608	\$ 74.60	\$ 45.32	\$ 20.25	\$ 65.57	\$ 1,311		
105			CU-1 2.0 TR MFR: Samsung Model: MXZ-3C24NA2 Size: 31-3/32"x37-13/32"x13"	EA	1	0%	1	8.000	\$ 74.60	\$ 596.80	\$ 2,367.75	\$ 2,964.55	\$ 2,965		
106			CU-2 2.0 TR MFR: Samsung Model: MXZ-3C24NA2 Size: 31-3/32"x37-13/32"x13"	EA	1	0%	1	8.000	\$ 74.60	\$ 596.80	\$ 2,367.75	\$ 2,964.55	\$ 2,965		
												SUBTOTAL	\$ 22,137		
EARTHWORK															
107	A102		Excavation	CY	527	10%	580	0.260	\$ 101.00	\$ 26.26		\$ 26.26	\$ 15,225		
108			Backfill	CY	458	10%	504	0.190	\$ 101.00	\$ 19.19		\$ 19.19	\$ 9,675		
109			Dispose off	CY	69	10%	76	0.100	\$ 101.00	\$ 10.10		\$ 10.10	\$ 768		
												SUBTOTAL	\$ 25,668		

DETAILED BREAKDOWN OF ITEMS														
Project Name	MECHANIC SHOP 2317 WEST ARKANSAS LANE													
Project ID:	1005-02													
Scope:	G.C.													
														
													Date:	8-May-24
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
EXTERIOR IMPROVEMENTS														
110	L100	Plan Notes	4" Blue traffic lane paint	LF	255	10%	280	0.025	\$ 48.75	\$ 1.22	\$ 1.32	\$ 2.54	\$ 712	
111			4" concrete sidewalk	SF	1493	10%	1642	0.024	\$ 48.75	\$ 1.17	\$ 3.36	\$ 4.53	\$ 7,440	
112			Concrete curb Size: 1'-6"x0'-8"	LF	108	10%	119	0.156	\$ 48.75	\$ 7.61	\$ 16.28	\$ 23.89	\$ 2,836	
113			Lieu-in grass	SF	7558	10%	8314	0.003	\$ 48.75	\$ 0.15	\$ 0.10	\$ 0.25	\$ 2,047	
												SUBTOTAL	\$ 13,035	
PROJECTED COST													\$ 642,960	
OVERHEAD AND PROFIT												15%	\$ 96,444	
INSURANCE												3.0%	\$ 19,289	
CONTINGENCY												5.0%	\$ 32,148	
TAX												9.5%	\$ 61,081	
SUGGESTED BID													\$ 851,922	