

GENERAL SUMMARY

Project Name: Pinnacle

0

Project ID:

GC

Scope:



BUILDING GSF

17,366

DIVISION NO.	DESCRIPTION	TOTAL DIV. COST	TOTAL DIV. COST (PER SF)
1000	GENERAL REQUIREMENTS	\$ 144,400	\$ 8.32
3000	CONCRETE	\$ 351,083	\$ 20.22
4000	MASONRY	\$ 131,641	\$ 7.58
5000	METAL	\$ 28,522	\$ 1.64
6000	WOOD, PLASTIC & COMPONENTS	\$ 257,521	\$ 14.83
7000	THERMAL AND MOISTURE PROTECTION	\$ 163,678	\$ 9.43
8000	OPENINGS	\$ 226,266	\$ 13.03
9000	FINISHES	\$ 365,387	\$ 21.04
10000	SPECIALITIES	\$ 40,912	\$ 2.36
11000	EQUIPMENTS	\$ 2,343	\$ 0.13
12000	FURNISHING	\$ 22,778	\$ 1.31
22000	PLUMBING	\$ 109,264	\$ 6.29
23000	HVAC	\$ 360,509	\$ 20.76
26000	ELECTRICAL	\$ 135,181	\$ 7.78
28000	ELECTRONIC SAFETY AND SECURITY	\$ 13,368	\$ 0.77
31000	EARTHWORK	\$ 5,281	\$ 0.30
32000	EXTERIOR IMPROVEMENTS	\$ 606,595	\$ 34.93
33000	UTILITIES	\$ 86,213	\$ 4.96
TOTAL TRADE COST		\$ 3,050,942	\$ 176
OVERHEAD AND PROFIT	10%	\$ 305,094.24	\$ 17.57
INSURANCE CONTINGENCY	1.5%	\$ 45,764	\$ 2.64
TAX	2%	\$ 61,019	\$ 3.51
	5%	\$ 137,292	\$ 7.91
SUGGESTED BID		\$ 3,600,112	\$ 207.31

DETAILED BREAKDOWN OF ITEMS



Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MAN/ HOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
GENERAL REQUIREMENTS														
1			Permits	LS	1	0%	1	85.000	\$ 40.00	\$ 3,400.00	\$ -	\$ 3,400.00	\$ 3,400	
2			Supervision and Coordination	LS	1	0%	1	1500.000	\$ 40.00	\$ 60,000.00	\$ -	\$ 60,000.00	\$ 60,000	
3			Submittals and Shop drawings	LS	1	0%	1	0.000	\$ 40.00	\$ -	\$ -	\$ -	\$ -	
4			Final Cleaning	LS	1	0%	1	75.000	\$ 40.00	\$ 3,000.00	\$ -	\$ 3,000.00	\$ 3,000	
5			Mobilization Costs	LS	1	0%	1	650.000	\$ 40.00	\$ 26,000.00	\$ -	\$ 26,000.00	\$ 26,000	
6			Temporary Control & Facilities	LS	1	0%	1	1000.000	\$ 40.00	\$ 40,000.00	\$ -	\$ 40,000.00	\$ 40,000	
7			Scaffolding	LS	1	0%	1	300.000	\$ 40.00	\$ 12,000.00	\$ -	\$ 12,000.00	\$ 12,000	
												SUBTOTAL	\$ 144,400	
CONCRETE														
FOOTINGS														
			PAD FOOTINGS											
8	S1.02A-S1.01A	Plan Notes	F3 footing reinf. w/ [4]-#5 Bar Each Way Bottom Size: 3'-0"x3'-0"x1'-6"	CY	3	10%	3	3.000	\$ 47.00	\$ 141.00	\$ 316.00	\$ 457.00	\$ 1,508	
9			F4 footing reinf. w/ [4]#5 Bar Each Way Bottom Size: 4'-0"x4'-0"x1'-6"	CY	12	10%	14	3.000	\$ 47.00	\$ 141.00	\$ 316.00	\$ 457.00	\$ 6,256	
			GRADE BEAM											
10			Grade Beam reinf. w/ (3)#6 Top And Bottom And #3 Stirrups @ 12" O.C -#3 Dowel Bar @ 12" O.C Size: 2'-0" W x 3'-0" D x 669' L	CY	149	10%	164	3.000	\$ 47.00	\$ 141.00	\$ 316.00	\$ 457.00	\$ 74,735	
11			Grade Beam reinf. w/ (2)#6 Top And Bottom And #3 Stirrups @ 12" O.C -#3 Dowel Bar @ 12" O.C Size: 2'-0" W x 3'-0" D x 497' L	CY	110	10%	121	3.000	\$ 47.00	\$ 141.00	\$ 316.00	\$ 457.00	\$ 55,520	
12			Grade Beam reinf. w/ (3)#6 Top And Bottom And #3 Stirrups @ 12" O.C Size: 1'-2" W x 3'-0" D x 1177' L	CY	153	10%	168	3.000	\$ 47.00	\$ 141.00	\$ 316.00	\$ 457.00	\$ 76,721	
			TIE BEAM											
13			Tie Beam reinf. w/ (2)#5 Top And Bottom And #3 Stirrups @ 12" O.C Size: 1'-0" W x 1'-6" D x 28' L	CY	2	10%	1.7	3.000	\$ 47.00	\$ 141.00	\$ 316.00	\$ 457.00	\$ 782	
			SLAB											
14			Control joints @ Slab -1/8" x 1/2" Joint -3/8" Dia x 2' L Dowel Bar @ 18" O.C	LF	1707	10%	1878	0.048	\$ 47.00	\$ 2.26	\$ -	\$ 2.26	\$ 4,236	
15			4" Thk Concrete Slab On Grade W/#3 @ 12" O.C E.W	SF	16954	10%	18649	0.042	\$ 47.00	\$ 1.97	\$ 4.21	\$ 6.18	\$ 115,328	
16			10 mil polyethylene vapor barrier	SF	31094	10%	34203	0.002	\$ 47.00	\$ 0.09	\$ 0.18	\$ 0.27	\$ 9,372	
17			Compacted Fill	SF	16954	10%	18649	0.005	\$ 47.00	\$ 0.24	\$ -	\$ 0.24	\$ 4,383	
			CONCRETE FINISHES											
			BROOM FINISH											
18			Broom Finish Concrete Slab	SF	5423	10%	5965	0.008	\$ 47.00	\$ 0.38	\$ -	\$ 0.38	\$ 2,243	
												SUBTOTAL	\$ 351,083	
MASONRY														
EXTERIOR FINISH														
19			Brick veneer	SF	2618	10%	2880	0.183	\$ 47.00	\$ 8.60	\$ 8.50	\$ 17.10	\$ 49,247	



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MAN/ HOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
20	S1.02A-S1.01A	Plan Notes	Stone Veneer	SF	3439	10%	3783	0.200	\$ 47.00	\$ 9.40	\$ 10.88	\$ 20.28	\$ 76,710
21			4" H Stone Accent Band	LF	351	10%	386	0.160	\$ 47.00	\$ 7.52	\$ 7.20	\$ 14.72	\$ 5,683
SUBTOTAL													\$ 131,641
METAL													
BEAMS													
22	S1.02A-S1.01A	Plan Notes	W14 x 22	LBS	5522	10%	6074	0.015	\$ 52.18	\$ 0.78	\$ 1.44	\$ 2.22	\$ 13,501
COLUMNS													
23			W8 x 28 (EA : 14, H : 14')	LBS	5488	10%	6037	0.015	\$ 52.18	\$ 0.78	\$ 1.44	\$ 2.22	\$ 13,418
BASE PLATES													
24			Tag: BP-1 (EA : 14) 3/4" x 14" x 14"	LBS	42	10%	46	0.015	\$ 52.18	\$ 0.78	\$ 1.44	\$ 2.22	\$ 102
FASTENINGS													
25			3/4" Dia Anchor Bolts	EA	56	0%	56	0.135	\$ 52.18	\$ 7.04	\$ 11.32	\$ 18.36	\$ 1,028
26			1" Dia Anchor Bolts	EA	22	0%	22	0.150	\$ 52.18	\$ 7.83	\$ 13.66	\$ 21.49	\$ 473
SUBTOTAL													\$ 28,522
WOOD, PLASTIC & COMPOSITES													
TRUSSES													
27			Pre Engineered Wood Trusses (24" Deep) @ 24" O.C -(SF : 19083)	LF	9542	10%	10496	0.063	\$ 43.50	\$ 2.74	\$ 5.80	\$ 8.54	\$ 89,638
28			Girder Truss	LF	604	10%	664	0.063	\$ 43.50	\$ 2.74	\$ 5.80	\$ 8.54	\$ 5,674
BEAMS													
29			(3) 1-3/4" x 11-7/8" LVL Beam	LF	56	10%	62	0.055	\$ 43.50	\$ 2.39	\$ 5.96	\$ 8.35	\$ 515
30			(2) 1-3/4" x 11-7/8" LVL Beam	LF	15	10%	17	0.055	\$ 43.50	\$ 2.39	\$ 5.96	\$ 8.35	\$ 138
31			(3) 1-3/4" x 14" LVL Beam	LF	98	10%	108	0.058	\$ 43.50	\$ 2.52	\$ 7.03	\$ 9.55	\$ 1,030
32			(3) 2 x 12 Beam	LF	117	10%	129	0.044	\$ 43.50	\$ 1.91	\$ 2.12	\$ 4.03	\$ 519
33			(3) 2 x 10 Beam	LF	10	10%	11	0.042	\$ 43.50	\$ 1.83	\$ 2.06	\$ 3.89	\$ 43
34			8 x 12 Cedar Beam	LF	237	10%	261	0.134	\$ 43.50	\$ 5.85	\$ 19.21	\$ 25.06	\$ 6,533
35			6" W x 2'-6" H Faux Beam -Stained	LF	130	10%	143	0.230	\$ 43.50	\$ 10.00	\$ 32.86	\$ 42.86	\$ 6,129
36			6" W GLU-LAM Beam -Stained	LF	36	10%	40	0.228	\$ 43.50	\$ 9.90	\$ 32.50	\$ 42.40	\$ 1,679
HEADER													
37			(3) 2 x 6 Header	LF	94	10%	103	0.038	\$ 43.50	\$ 1.65	\$ 1.55	\$ 3.20	\$ 331
38			(3) 2 x 8 Header	LF	63	10%	69	0.040	\$ 43.50	\$ 1.74	\$ 1.71	\$ 3.45	\$ 239
39			(3) 2 x 12 Header	LF	34	10%	37	0.044	\$ 43.50	\$ 1.91	\$ 2.12	\$ 4.03	\$ 151
POSTS													
40			8 x 8 Wood Posts (H : 7'-6") -Structural Grade No.2	EA	6	0%	6	0.095	\$ 43.50	\$ 4.15	\$ 13.64	\$ 17.79	\$ 107
STUDS													
41			(2) 2 x 6 Wall Studs	EA	10	0%	10	0.038	\$ 43.50	\$ 1.65	\$ 1.55	\$ 3.20	\$ 32
42			(3) 2 x 6 Wall Studs	EA	22	0%	22	0.038	\$ 43.50	\$ 1.65	\$ 1.55	\$ 3.20	\$ 70
JOISTS													
43			2 x 10 Joists @ 12" O.C -Structural Grade No.2	LF	528	10%	581	0.042	\$ 43.50	\$ 1.83	\$ 2.06	\$ 3.89	\$ 2,258



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST		
44	S1.02A-S1.01A	Plan Notes	2 x 10 Rafters @ 12" O.C @ Dormer -Structural Grade No.2	LF	224	10%	246	0.042	\$ 43.50	\$ 1.83	\$ 2.06	\$ 3.89	\$ 958		
				BLOCKING											
45				2 x 6 Wood Blocking	LF	998	10%	1098	0.038	\$ 43.50	\$ 1.65	\$ 1.55	\$ 3.20	\$ 3,516	
				CONNECTIONS											
46				Simpson H6	EA	30	0%	30	0.068	\$ 43.50	\$ 2.96	\$ 6.03	\$ 8.99	\$ 265	
47				Simpson H2.5A	EA	244	0%	244	0.045	\$ 43.50	\$ 1.96	\$ 1.32	\$ 3.28	\$ 800	
48				HDU14-SDS2.5 Hold-downs	EA	22	0%	22	0.300	\$ 43.50	\$ 13.05	\$ 78.11	\$ 91.16	\$ 2,006	
49				2 x 6 Kicker Plates @ 24" O.C (EA : 149)	LF	723	10%	796	0.038	\$ 43.50	\$ 1.65	\$ 1.55	\$ 3.20	\$ 2,549	
				SHEATHING											
50				19/32" Roof Sheathing	SF	20036	10%	22040							
51				No of Sheets (4x8)	EA	689	0%	689	0.640	\$ 43.50	\$ 27.84	\$ 35.84	\$ 63.68	\$ 43,859	
52				Nailing	EA	51655	0%	51655	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 5,527	
53				3/4" Plywood Sheathing	SF	29	10%	32							
54				No of Sheets (4x8)	EA	1	0%	1	0.384	\$ 43.50	\$ 16.70	\$ 41.92	\$ 58.62	\$ 58	
55				Nailing	EA	75	0%	75	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 8	
				FINISH CARPENTRY											
				MILLWORK											
56				2' D x 2'-10" H Base Cabinets W/Drawers and Hardware's	LF	95	10%	105	1.100	\$ 43.50	\$ 47.85	\$ 137.50	\$ 185.35	\$ 19,369	
57				1' D x 4' H Wall Mounted Cabinets W/Shelves Inside	LF	116	10%	128	1.030	\$ 43.50	\$ 44.81	\$ 128.63	\$ 173.44	\$ 22,130	
58				1'-2" D x 4'-5" H Storage Closet W/Plastic Laminate Doors And Shelves	LF	99	10%	109	1.080	\$ 43.50	\$ 46.98	\$ 134.50	\$ 181.48	\$ 19,763	
59				1'-2" D x 8'-4 H Storage Closet W/Plastic Laminate Doors And Shelves	LF	8	10%	9	1.310	\$ 43.50	\$ 56.99	\$ 163.10	\$ 220.09	\$ 1,937	
60				1' D x 3'-6" H Open Wall Mounted Cabinets W/Shelves Inside	LF	19	10%	21	0.990	\$ 43.50	\$ 43.07	\$ 123.12	\$ 166.19	\$ 3,473	
61				1' D x 1' H Open Wall Mounted Cabinets W/Shelves Inside	LF	8	10%	9	0.730	\$ 43.50	\$ 31.76	\$ 91.25	\$ 123.01	\$ 1,082	
62				1' D x 5" H x 9" W Fixed Cubicles	EA	50	0%	50	1.400	\$ 43.50	\$ 60.90	\$ 174.00	\$ 234.90	\$ 11,745	
63				1' D x 1' H Wall Mounted Cabinets W/Shelves Inside	LF	4	10%	4	0.730	\$ 43.50	\$ 31.76	\$ 91.25	\$ 123.01	\$ 541	
64				1' D x 2' H Wall Mounted Cabinets W/Shelves Inside	LF	5	10%	6	0.840	\$ 43.50	\$ 36.54	\$ 103.80	\$ 140.34	\$ 772	
65		1' D x 3' H Wall Mounted Cabinets W/Shelves Inside	LF	10	10%	11	0.880	\$ 43.50	\$ 38.28	\$ 109.75	\$ 148.03	\$ 1,628			
66		1' D x 1'-6" H Wall Mounted Cabinets W/Shelves Inside	LF	3	10%	3	0.810	\$ 43.50	\$ 35.24	\$ 100.66	\$ 135.90	\$ 448			
		Note: All Millwork Is To Receive Plastic Laminate Finish													
SUBTOTAL \$													257,521		
THERMAL AND MOISTURE PROTECTION															
			INSULATION												
67			R-38 Roof Insulation	SF	8059	10%	8865	0.020	\$ 44.03	\$ 0.88	\$ 2.18	\$ 3.06	\$ 27,131		
68			Tapered Insulation	SF	177	10%	195	0.035	\$ 44.03	\$ 1.54	\$ 3.50	\$ 5.04	\$ 981		
			EXTERIOR FINISHES												
69			3 Coat Stucco System On Metal Mesh	SF	3998	10%	4398	0.059	\$ 44.03	\$ 2.60	\$ 1.72	\$ 4.32	\$ 18,988		
70			Hardie Board Siding	SF	174	10%	191	0.035	\$ 44.03	\$ 1.54	\$ 3.25	\$ 4.79	\$ 917		
71			8" H Stucco Accent Band	LF	205	10%	226	0.085	\$ 44.03	\$ 3.74	\$ 3.74	\$ 7.48	\$ 1,687		
			ROOFING												
72			Asphalt Shingle Roof System	SF	11976	10%	13174	0.016	\$ 44.03	\$ 0.70	\$ 1.45	\$ 2.15	\$ 28,381		
73			15 LB Underlayment	SF	11976	10%	13174	0.002	\$ 44.03	\$ 0.09	\$ 0.18	\$ 0.27	\$ 3,531		
74			TPO Roofing System	SF	2390	10%	2629	0.016	\$ 44.03	\$ 0.70	\$ 1.63	\$ 2.33	\$ 6,137		

**DETAILED BREAKDOWN OF ITEMS**

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MAN/ HOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST		
	A0.00-A9.4	Plan Notes													
75			PVC Roofing	SF	5669	10%	6236	0.020	\$ 44.03	\$ 0.88	\$ 1.92	\$ 2.80	\$ 17,464		
76			1/4" Cover Board	SF	5669	10%	6236	0.012	\$ 44.03	\$ 0.53	\$ 1.12	\$ 1.65	\$ 10,279		
			ROOF ACCESSORIES												
77			1' H Insulated Curb	LF	11	10%	12	0.125	\$ 44.03	\$ 5.50	\$ 19.13	\$ 24.63	\$ 298		
78			Pre Finished Metal Gutter	LF	639	10%	703	0.058	\$ 44.03	\$ 2.55	\$ 6.24	\$ 8.79	\$ 6,181		
79			1/2" Hardie Plank Soffit	SF	2198	10%	2417	0.035	\$ 44.03	\$ 1.54	\$ 2.63	\$ 4.17	\$ 10,082		
80			Roof Downspout (10' H)	EA	12	0%	12	0.550	\$ 44.03	\$ 24.21	\$ 51.90	\$ 76.11	\$ 913		
81			Roof Downspout (14' H)	EA	4	0%	4	0.770	\$ 44.03	\$ 33.90	\$ 72.66	\$ 106.56	\$ 426		
82			12" W x 8" H Roof Scupper	EA	7	0%	7	0.750	\$ 44.03	\$ 33.02	\$ 86.13	\$ 119.15	\$ 834		
83			Pre Finished Metal Collection Box	EA	4	0%	4	0.950	\$ 44.03	\$ 41.82	\$ 98.24	\$ 140.06	\$ 560		
84			Steel Ladder W/3/4" Dia Runs @ 12" O.C (11' H)	EA	1	0%	1	6.400	\$ 44.03	\$ 281.76	\$ 1,284.00	\$ 1,565.76	\$ 1,566		
85			30" x 36" Roof Hatch	EA	1	0%	1	7.250	\$ 44.03	\$ 319.18	\$ 1,369.13	\$ 1,688.31	\$ 1,688		
86			2'-4" X 3'-4" Roof Access Hatch	EA	1	0%	1	7.250	\$ 44.03	\$ 319.18	\$ 1,541.00	\$ 1,860.18	\$ 1,860		
87			Roof Screen Wall (5' H)	LF	119	10%	131	0.750	\$ 44.03	\$ 33.02	\$ 46.13	\$ 79.14	\$ 10,360		
88			Dormer W/Roof Vent	SF	224	10%	246	0.055	\$ 44.03	\$ 2.42	\$ 5.13	\$ 7.55	\$ 1,861		
			SHEET METAL FLASHING AND TRIMS												
89			Pre Finished Metal Drip Edge Flashing	LF	639	10%	703	0.036	\$ 44.03	\$ 1.58	\$ 3.54	\$ 5.12	\$ 3,602		
90			Ridge Flashing	LF	434	10%	477	0.030	\$ 44.03	\$ 1.32	\$ 1.91	\$ 3.23	\$ 1,542		
91			Valley Flashing	LF	132	10%	145	0.030	\$ 44.03	\$ 1.32	\$ 1.91	\$ 3.23	\$ 469		
92			10" W x 6" H Pre Finished Metal Coping	LF	317	10%	349	0.068	\$ 44.03	\$ 2.99	\$ 7.00	\$ 9.99	\$ 3,485		
93			Counter Flashing	LF	317	10%	349	0.038	\$ 44.03	\$ 1.67	\$ 3.63	\$ 5.30	\$ 1,849		
94			Pre Finished Metal Flashing	LF	130	10%	143	0.033	\$ 44.03	\$ 1.45	\$ 2.77	\$ 4.22	\$ 604		
										SUBTOTAL \$		163,678			
OPENINGS															
DOORS															
95					3' W x 6'-8" H Insulated Raised Panel Metal Door W/Hollow Metal Frame	EA	14	0%	14	8.932	\$ 54.50	\$ 486.82	\$ 1,116.56	\$ 1,603.38	\$ 22,447
96			3' W x 6'-8" H Flush Solid Core Wood Door W/Hollow Metal Frame	EA	4	0%	4	5.203	\$ 54.50	\$ 283.54	\$ 650.33	\$ 933.87	\$ 3,735		
97			3' W x 7'-0" H Type Flush Solid Core Wood Door W/Hollow Metal Frame	EA	1	0%	1	5.460	\$ 54.50	\$ 297.57	\$ 682.50	\$ 980.07	\$ 980		
98			3' W x 6'-8" H Solid Core Wood Door W/Hollow Metal Frame And With One Way Vision Glass Panel	EA	9	0%	9	5.683	\$ 54.50	\$ 309.71	\$ 710.36	\$ 1,020.07	\$ 9,181		
99			3' W x 7'-0" H Flush Hollow Metal Door W/Frame	EA	11	0%	11	9.374	\$ 54.50	\$ 510.90	\$ 1,171.80	\$ 1,682.70	\$ 18,510		
100			3' W x 4'-10" H Flush Hollow Metal Door W/Frame	EA	1	0%	1	6.468	\$ 54.50	\$ 352.52	\$ 808.54	\$ 1,161.07	\$ 1,161		
101			6' W x 7'-0" H Wide Style Clear Anodized Aluminum Insulated Glass W/Frame	EA	2	0%	2	13.377	\$ 54.50	\$ 729.05	\$ 1,911.00	\$ 2,640.05	\$ 5,280		
102			6' W x 7'-0" H Flush Solid Core Wood Door W/Anodized Aluminum Frame	EA	1	0%	1	9.555	\$ 54.50	\$ 520.75	\$ 1,365.00	\$ 1,885.75	\$ 1,886		
103			3' W x 6'-8" H Flush Solid Core Wood Door W/Vision Panel And Hollow Metal Frame	EA	1	0%	1	5.203	\$ 54.50	\$ 283.54	\$ 650.33	\$ 933.87	\$ 934		
104			3' W x 7'-0" H Flush Hollow Metal Door W/Vision Panel And Hollow Metal Frame	EA	1	0%	1	8.789	\$ 54.50	\$ 478.97	\$ 1,171.80	\$ 1,650.77	\$ 1,651		
105			6' W x 6'-8" H Flush Solid Core Wood Door W/Hollow Metal Frame	EA	1	0%	1	9.755	\$ 54.50	\$ 531.64	\$ 1,300.65	\$ 1,832.29	\$ 1,832		
106			3' W x 7' H Type Medium Style Clear Anodized Aluminum Insulated Glass W/Frame	EA	5	0%	5	7.644	\$ 54.50	\$ 416.60	\$ 955.50	\$ 1,372.10	\$ 6,860		



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023
 Scope: GC
 Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
107			3' W x 7' H Flush Hollow Metal Door W/Vision Panel And Hollow Metal Frame	EA	6	0%	6	5.964	\$ 54.50	\$ 325.04	\$ 745.50	\$ 1,070.54	\$ 6,423
			HARDWARES										
108			Hardware Set #4 -Description: Ext - Sgl - Storeroom - Closer/stop 3 Hinge TA2314 NRP 4-1/2" x 4-1/2" US32D MK 1 Storeroom or Closet Lock AU 4605LN 626 YA 1 Surface Closer UNJ3501 689 YA 1 Threshold 253x3AFG MSES25SS PE 1 Rain Guard 346C PE 1 Sweep 315CN PE	EA	14	0%	14	3.470	\$ 54.50	\$ 189.12	\$ 692.24	\$ 881.36	\$ 12,339
109			Hardware Set #17 -Description: Sgl - Privacy 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Privacy Lock AU 4602LN 626 YA 1 Door Stop 441CU US26D RO 1 Gasketing S88D PE	EA	10	0%	10	1.100	\$ 54.50	\$ 59.95	\$ 182.87	\$ 242.82	\$ 2,428
110			Hardware Set #13 -Description: Sgl - Sec - Classroom - HD SP Closer 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Intruder Classroom Security AU 4718LN 626 YA 1 Surface Closer 3521 689 YA 3 Silencer - Metal Frame 608 RO	EA	6	0%	6	3.020	\$ 54.50	\$ 164.59	\$ 602.11	\$ 766.70	\$ 4,600
111			Hardware Set #11 -Description: Sgl - Office - HD Closer 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Entry Lock AU 4604LN 626 YA 1 Surface Closer 3501 689 YA 1 Door Stop 441cu US26D RO 3 Silencer - Metal Frame 608 RO	EA	2	0%	2	2.490	\$ 54.50	\$ 135.71	\$ 496.16	\$ 631.87	\$ 1,264
112			Hardware Set #1 -Description: Ext - Pair - Alum - CVR/NL MELR - Keypad - Remote Release - HD Par SP Closers 1 Continuous Hinge _FM_SLF-HD1 PE 1 Continuous Hinge _FM__SLI-HD1 SERxx PE 1 Exit Device (eo) 6160 EO 630 YA 1 Exit Device nl, elr) 6160 P 121NL 630 YA 2 Offset Door Pull RM3331-36 Mtg-Type 12XHD US32D RO 2 Surface Closer UNJ3501 689 YA 1 Threshold 252x3AFG MSES25SS PE 2 Sweep 315CN PE 1 Astragal S771D PE 1 ElectroLynx Harness QC-Cxxx sized for door width MK 1 ElectroLynx Harness QC-C1500P MK 1 Door Release TS-18 AK 1 Digital Keypad Procure OT 1 Controller 782 YA	EA	1	0%	1	9.410	\$ 54.50	\$ 512.85	\$ 3,760.02	\$ 4,272.87	\$ 4,273



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
113	A0.00-A9.4	Plan Notes	Hardware Set #6 -Description: Vestibule - Pair - SVRPassege - HD Par SP Closers 6 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 2 SVR Exit, Passage 6170 LBR AU628F 630 YA 2 Surface Closer 3521 689 YA 1 Gasketing S88D PE 1 Astragal S771D PE	EA	1	0%	1	6.470	\$ 54.50	\$ 352.62	\$ 2,586.95	\$ 2,939.57	\$ 2,940
114			Hardware Set #9 -Description: Sgl - Storeroom, - HD Closer 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Storeroom or Closet Lock AU 4605LN 626 YA 1 Surface Closer 3521 689 YA 1 Silencer - Metal Frame 608 RO	EA	2	0%	2	2.550	\$ 54.50	\$ 138.98	\$ 508.42	\$ 647.40	\$ 1,295
115			Hardware Set #14 -Description: Sgl - Passage - W/F Stop 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Passage Latch AU 4601LN 626 YA 1 Door Stop 441CU US26D RO 3 Silencer - Metal Frame 608 RO	EA	1	0%	1	0.700	\$ 54.50	\$ 38.15	\$ 115.58	\$ 153.73	\$ 154
116			Hardware Set #10 -Description: Sgl - Storeroom, - OH Stop 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Storeroom or Closet Lock AU 4605LN 626 YA 1 Surface Closer 3501 689 YA 1 Surf Overhead Stop 55-X36 652 RF 3 Silencer - Metal Frame 608 RO	EA	1	0%	1	3.090	\$ 54.50	\$ 168.41	\$ 617.50	\$ 785.91	\$ 786
117			Hardware Set #16 -Description: Sgl - Passage - Closer - OH Stop 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Passage Latch AU 4601LN 626 YA 1 Surface Overhead Stop 55-X36 652 RF 1 Surface Closer 3501 689 YA 1 Gasketing S88D PE 3 Silencer - Metal Frame 608 RO	EA	1	0%	1	2.990	\$ 54.50	\$ 162.96	\$ 597.42	\$ 760.38	\$ 760
118			Hardware Set #8 -Description: Sgl - Storeroom, - HD Closer 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Storeroom or Closet Lock AU 4605LN 626 YA 1 Surface Closer 3501 689 YA 1 Door Stop 441CU US26D RO 3 Silencer - Metal Frame 608 RO	EA	1	0%	1	2.600	\$ 54.50	\$ 141.70	\$ 518.77	\$ 660.47	\$ 660
119			Hardware Set #2 -Description: Ext - Pair - Alum - Alum - CVR/Lever - HD Par SP Closers 2 Continuous Hinge _FM_SLF-HD1 PE 2 CVR Exit Device (classroom) 6160 AU506F 630 YA 2 Surface Closer UN13501 689 YA 1 Threshold 252x3AFG MSSES25SS PE 2 Sweep 315CN PE	EA	1	0%	1	5.590	\$ 54.50	\$ 304.66	\$ 2,232.40	\$ 2,537.06	\$ 2,537



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
120			Hardware Set #12 -Description: Sgl - Sec - Classroom - Closer 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Intruder Classroom Security AU 4718LN 626 YA 1 Surface Closer 3501 689 YA 1 Door Stop 441CU US26D RO 3 Silencer - Metal Frame 608 RO	EA	4	0%	4	3.030	\$ 54.50	\$ 165.14	\$ 604.26	\$ 769.40	\$ 3,078
121			Hardware Set #15 -Description: Sgl - Passage - OH Stop 3 Hinge, Full Mortise TA2714 4-1/2" x 4-1/2" US26D MK 1 Passage Latch AU 4601LN 626 YA 1 Surf Overhead Stop 55-X36 652 RF 3 Silencer - Metal Frame 608 RO	EA	1	0%	1	2.400	\$ 54.50	\$ 130.80	\$ 479.33	\$ 610.13	\$ 610
122			Hardware Set #7 -Description: Pair - Storeroom - MFB - OH Stop 6 Hinge TA2714 4-1/2" x 4-1/2" US26D MK 2 Flush Bolt 557 US26D RO 1 Dust Proof Strike 570 US26D RO 1 Storeroom or Closet Lock AU 4605LN 626 YA 2 Surf Overhead Stop 55-X36 652 RF 2 Silencer - Metal Frame 608 RO	EA	1	0%	1	3.020	\$ 54.50	\$ 164.59	\$ 602.77	\$ 767.36	\$ 767
123			Hardware Set #3 -Description: Ext - Sgl - Alum - Push/Pull - Deadlatch - HD SP Closer 1 Continuous Hinge _FM_SLF-HD1 PE 1 Deadlatch 4900 628 AD 1 Paddle Operator 4591-01-02 US26D AD 1 Mortise Cylinder as required 626 YA 1 Push Bar RM3112 Mtg-Type 12XHD US32D RO 1 Offset Door Pull RM3331-36 Mtg-Type 12XHD US32D RO 1 Surface Closer UNI3501 689 YA 1 Threshold 252x3AFG MSES25SS PE 1 Sweep 315CN PE	EA	5	0%	5	6.980	\$ 54.50	\$ 380.41	\$ 2,791.00	\$ 3,171.41	\$ 15,857
124			Hardware Set #5 -Description: Ext - Sgl - Rim/NL - Closer/stop 3 Hinge, Full Mortise TA2314 NRP 4-1/2" x 4-1/2" US32D MK 1 Rim Exit Device (sr) 6100 AU427F 630 YA 1 Surface Closer UNI3501 689 YA 1 Threshold 253x3AFG MSES25SS PE 1 Rain Guard 346C PE 1 Sweep 315CN PE	EA	5	0%	5	2.690	\$ 54.50	\$ 146.61	\$ 537.41	\$ 684.02	\$ 3,420
			WINDOWS										
125			8'-8" W x 4'-6" H (3) Fiberglass Single Hung Window W/7/8" Insulated Glass -U Factor 0.30 Min	EA	7	0%	7	13.660	\$ 54.50	\$ 744.47	\$ 1,385.03	\$ 2,129.50	\$ 14,907
126			5'-0" W x 4'-6" H (2) Fiberglass Single Hung Window W/7/8" Insulated Glass -U Factor 0.30 Min	EA	2	0%	2	7.880	\$ 54.50	\$ 429.46	\$ 798.75	\$ 1,228.21	\$ 2,456



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
127			4'-0" W x 4'-6" H Fiberglass Single Hung Window W/7/8" Insulated Glass -U Factor 0.30 Min	EA	6	0%	6	6.300	\$ 54.50	\$ 343.35	\$ 639.00	\$ 982.35	\$ 5,894
128			6'-0" W x 5'-2" H Aluminum Fixed Window W/1" Insulated Tinted Glass -U Factor 0.30 Min	EA	4	0%	4	10.860	\$ 54.50	\$ 591.87	\$ 1,101.21	\$ 1,693.08	\$ 6,772
129			3'-0" W x 3'-8" H Fiberglass Single Hung Window W/1" Insulated Glass -U Factor 0.30 Min	EA	1	0%	1	3.860	\$ 54.50	\$ 210.37	\$ 390.86	\$ 601.23	\$ 601
130			3'-4" W x 3'-1" H Aluminum Fixed Window W/1" Insulated Tinted Glass -U Factor 0.30 Min	EA	2	0%	2	3.600	\$ 54.50	\$ 196.20	\$ 364.46	\$ 560.66	\$ 1,121
131			3'-4" W x 4'-6" H Aluminum Fixed Window W/1" Insulated Tinted Glass -U Factor 0.30 Min	EA	2	0%	2	5.250	\$ 54.50	\$ 286.13	\$ 531.97	\$ 818.09	\$ 1,636
132			6' W x 6' H Arched Aluminum Fixed Window W/1" Insulated Tinted Glass -U Factor 0.30 Min	EA	1	0%	1	12.600	\$ 54.50	\$ 686.70	\$ 1,278.00	\$ 1,964.70	\$ 1,965
133			6'-0" W x 5'-2" H Aluminum Fixed Window W/1" Insulated Tinted Glass -U Factor 0.30 Min	EA	2	0%	2	10.860	\$ 54.50	\$ 591.87	\$ 1,101.21	\$ 1,693.08	\$ 3,386
134			5' H Round Aluminum Fixed Window W/1" Insulated Tinted Glass -U Factor 0.30 Min	EA	1	0%	1	6.870	\$ 54.50	\$ 374.42	\$ 696.69	\$ 1,071.10	\$ 1,071
135			15' W x 9' H Anodized Aluminum Insulated Tinted Glass Storefront	EA	2	0%	2	35.440	\$ 54.50	\$ 1,931.48	\$ 4,792.50	\$ 6,723.98	\$ 13,448
136			15'-4" W x 9' H Anodized Aluminum Insulated Tinted Glass Storefront	EA	5	0%	5	36.220	\$ 54.50	\$ 1,973.99	\$ 4,897.94	\$ 6,871.93	\$ 34,360
SUBTOTAL \$													226,266
FINISHES													
DRY WALL ASSEMBLIES													
137			Shear Wall SW-1 As	SF	1570	LF	157	H	10				
			One Layer of 5/8" Gypsum Board on Single Side	SF	1570								
138			No of Sheets (4x8)	EA	54	0%	54	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 1,791
139			Tapping	LF	785	10%	864	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 280
140			Joint Compound	LBS	204	10%	225	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 372
141			Screws	EA	2591	0%	2591	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 277
			15/32" OSB Grade-1 Sheathing @ One Side	SF	1570								
142			No of Sheets (4x8)	EA	54	0%	54	0.640	\$ 43.50	\$ 27.84	\$ 33.60	\$ 61.44	\$ 3,316
143			Screws	EA	4048	0%	4048	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 433
144			2 x 6 Wood Studs @ 10' L	EA	118	0%	118	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 3,781
145			2 x 6 Double Wooden Plate At Top @ 10' L	EA	31	0%	31	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 1,006
146			2 x 6 Wooden Plate At Bottom @ 10' L	EA	16	0%	16	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 503
147			R-21 Insulation	SF	1570	10%	1727	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 2,467
148			Sealant @ All Penetrations	LF	628	10%	691	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 490
149			Shear Wall SW-1 As	SF	882	LF	42	H	21				
			One Layer of 5/8" Gypsum Board on Single Side	SF	882								



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
150			No of Sheets (4x8)	EA	30	0%	30	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 1,006
151			Tapping	LF	441	10%	485	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 157
152			Joint Compound	LBS	115	10%	126	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 209
153			Screws	EA	1455	0%	1455	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 156
			15/32" OSB Grade-1 Sheathing @ One Side	SF	882								
154			No of Sheets (4x8)	EA	30	0%	30	0.640	\$ 43.50	\$ 27.84	\$ 33.60	\$ 61.44	\$ 1,863
155			Screws	EA	2274	0%	2274	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 243
156			2 x 6 Wood Studs @ 22' L	EA	32	0%	32	0.836	\$ 43.50	\$ 36.37	\$ 34.10	\$ 70.47	\$ 2,225
157			2 x 6 Double Wooden Plate At Top @ 10' L	EA	8	0%	8	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 269
158			2 x 6 Wooden Plate At Bottom @ 10' L	EA	4	0%	4	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 135
159			R-21 Insulation	SF	882	10%	970	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 1,386
160			Sealant @ All Penetrations	LF	168	10%	185	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 131
161			Exterior Wall As :	SF	4650	LF	465	H	10				
			One Layer of 5/8" Gypsum Board on Single Side	SF	4650								
162			No of Sheets (4x8)	EA	160	0%	160	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 5,304
163			Tapping	LF	2325	10%	2558	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 830
164			Joint Compound	LBS	605	10%	665	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 1,100
165			Screws	EA	7673	0%	7673	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 821
			7/16" OSB Grade-1 Sheathing @ Exterior Side	SF	4650								
166			No of Sheets (4x8)	EA	160	0%	160	0.640	\$ 43.50	\$ 27.84	\$ 29.44	\$ 57.28	\$ 9,156
167			Screws	EA	11988	0%	11988	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 1,283
168			2 x 6 Wood Studs @ 10' L	EA	350	0%	350	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 11,198
169			2 x 6 Double Wooden Plate At Top @ 10' L	EA	93	0%	93	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 2,979
170			2 x 6 Wooden Plate At Bottom @ 10' L	EA	47	0%	47	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 1,489
171			R-21 Insulation	SF	4650	10%	5115	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 7,307
172			Moisture Barrier	SF	4650	10%	5115	0.002	\$ 43.50	\$ 0.09	\$ 0.16	\$ 0.25	\$ 1,263
173			Sealant @ All Penetrations	LF	930	10%	1023	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 725
174			Exterior Wall As :	SF	574	LF	31	H	18.5				
			One Layer of 5/8" Gypsum Board on Single Side	SF	574								
175			No of Sheets (4x8)	EA	20	0%	20	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 654
176			Tapping	LF	287	10%	315	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 102
177			Joint Compound	LBS	75	10%	82	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 136
178			Screws	EA	946	0%	946	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 101
			7/16" OSB Grade-1 Sheathing @ Exterior Side	SF	574								
179			No of Sheets (4x8)	EA	20	0%	20	0.640	\$ 43.50	\$ 27.84	\$ 29.44	\$ 57.28	\$ 1,129
180			Screws	EA	1479	0%	1479	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 158
181			2 x 6 Wood Studs @ 20' L	EA	23	0%	23	0.760	\$ 43.50	\$ 33.06	\$ 31.00	\$ 64.06	\$ 1,493
182			2 x 6 Double Wooden Plate At Top @ 10' L	EA	6	0%	6	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 199
183			2 x 6 Wooden Plate At Bottom @ 10' L	EA	3	0%	3	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 99
184			R-21 Insulation	SF	574	10%	631	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 901
185			Moisture Barrier	SF	574	10%	631	0.002	\$ 43.50	\$ 0.09	\$ 0.16	\$ 0.25	\$ 156
186			Sealant @ All Penetrations	LF	62	10%	68	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 48
187			Exterior Wall As :	SF	609	LF	29	H	21				
			One Layer of 5/8" Gypsum Board on Single Side	SF	609								
188			No of Sheets (4x8)	EA	21	0%	21	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 695
189			Tapping	LF	305	10%	335	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 109
190			Joint Compound	LBS	79	10%	87	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 144
191			Screws	EA	1005	0%	1005	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 108



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
			7/16" OSB Grade-1 Sheathing @ Exterior Side	SF	609								
192			No of Sheets (4x8)	EA	21	0%	21	0.640	\$ 43.50	\$ 27.84	\$ 29.44	\$ 57.28	\$ 1,199
193			Screws	EA	1570	0%	1570	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 168
194			2 x 6 Wood Studs @ 22' L	EA	22	0%	22	0.836	\$ 43.50	\$ 36.37	\$ 34.10	\$ 70.47	\$ 1,536
195			2 x 6 Double Wooden Plate At Top @ 10' L	EA	6	0%	6	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 186
196			2 x 6 Wooden Plate At Bottom @ 10' L	EA	3	0%	3	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 93
197			R-21 Insulation	SF	609	10%	670	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 957
198			Moisture Barrier	SF	609	10%	670	0.002	\$ 43.50	\$ 0.09	\$ 0.16	\$ 0.25	\$ 165
199			Sealant @ All Penetrations	LF	58	10%	64	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 45
200			Exterior Wall As :	SF	180	LF	30	H	6				
			One Layer of 5/8" Gypsum Board on Single Side	SF	180								
201			No of Sheets (4x8)	EA	6	0%	6	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 205
202			Tapping	LF	90	10%	99	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 32
203			Joint Compound	LBS	23	10%	26	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 43
204			Screws	EA	297	0%	297	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 32
			7/16" OSB Grade-1 Sheathing @ Exterior Side	SF	180								
205			No of Sheets (4x8)	EA	6	0%	6	0.640	\$ 43.50	\$ 27.84	\$ 29.44	\$ 57.28	\$ 354
206			Screws	EA	464	0%	464	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 50
207			2 x 6 Wood Studs @ 22' L	EA	23	0%	23	0.836	\$ 43.50	\$ 36.37	\$ 34.10	\$ 70.47	\$ 1,589
208			2 x 6 Double Wooden Plate At Top @ 10' L	EA	6	0%	6	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 192
209			2 x 6 Wooden Plate At Bottom @ 10' L	EA	3	0%	3	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 96
210			R-21 Insulation	SF	180	10%	198	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 283
211			Moisture Barrier	SF	180	10%	198	0.002	\$ 43.50	\$ 0.09	\$ 0.16	\$ 0.25	\$ 49
212			Sealant @ All Penetrations	LF	60	10%	66	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 47
213			Exterior Wall As :	SF	4452	LF	318	H	14				
			One Layer of 5/8" Gypsum Board on Single Side	SF	4452								
214			No of Sheets (4x8)	EA	153	0%	153	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 5,078
215			Tapping	LF	2226	10%	2449	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 795
216			Joint Compound	LBS	579	10%	637	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 1,054
217			Screws	EA	7346	0%	7346	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 786
			7/16" OSB Grade-1 Sheathing @ Exterior Side	SF	4452								
218			No of Sheets (4x8)	EA	153	0%	153	0.640	\$ 43.50	\$ 27.84	\$ 29.44	\$ 57.28	\$ 8,766
219			Screws	EA	11478	0%	11478	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 1,228
220			2 x 6 Wood Studs @ 14' L	EA	239	0%	239	0.532	\$ 43.50	\$ 23.14	\$ 21.70	\$ 44.84	\$ 10,722
221			2 x 6 Double Wooden Plate At Top @ 10' L	EA	64	0%	64	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 2,037
222			2 x 6 Wooden Plate At Bottom @ 10' L	EA	32	0%	32	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 1,019
223			R-21 Insulation	SF	4452	10%	4897	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 6,996
224			Moisture Barrier	SF	4452	10%	4897	0.002	\$ 43.50	\$ 0.09	\$ 0.16	\$ 0.25	\$ 1,210
225			Sealant @ All Penetrations	LF	636	10%	700	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 496
226			Tag P3 Plumbing Wall As:	SF	333	LF	35	H	9.5				
			One Layer of 5/8" Moisture Resistant Gypsum Board on Both Sides	SF	665								
227			No of Sheets (4x8)	EA	23	0%	23	0.384	\$ 43.50	\$ 16.70	\$ 17.12	\$ 33.82	\$ 773
228			Tapping	LF	333	10%	366	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 119
229			Joint Compound	LBS	86	10%	95	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 157
230			Screws	EA	1097	0%	1097	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 117
231			Double 2 x 6 Wood Studs @ 10' L	EA	53	0%	53	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 1,686
232			2 x 6 Double Wooden Plate At Top @ 10' L	EA	7	0%	7	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 224



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
233	A0.00-A9.4	Plan Notes	2 x 6 Wooden Plate At Bottom @ 10' L	EA	4	0%	4	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 112
234			R-21 Insulation	SF	333	10%	366	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 522
235			Sealant @ All Penetrations	LF	140	10%	154	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 109
236			2 x 6 Interior Stud Wall As:	SF	1644	LF	173	H	9.5				
			One Layer of 5/8" Gypsum Board on Both Sides	SF	3287								
237			No of Sheets (4x8)	EA	113	0%	113	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 3,749
238			Tapping	LF	1644	10%	1808	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 587
239			Joint Compound	LBS	427	10%	470	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 778
240			Screws	EA	5424	0%	5424	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 580
241			2 x 6 Wood Studs @ 10' L	EA	130	0%	130	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 4,166
242			2 x 6 Double Wooden Plate At Top @ 10' L	EA	35	0%	35	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 1,108
243			2 x 6 Wooden Plate At Bottom @ 10' L	EA	17	0%	17	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 554
244			R-21 Insulation	SF	1644	10%	1808	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 2,583
245			Sealant @ All Penetrations	LF	692	10%	761	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 540
246			2 x 6 Interior Stud Wall As:	SF	2079	LF	99	H	21				
			One Layer of 5/8" Gypsum Board on Both Sides	SF	4158								
247			No of Sheets (4x8)	EA	143	0%	143	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 4,743
248			Tapping	LF	2079	10%	2287	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 742
249			Joint Compound	LBS	541	10%	595	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 984
250			Screws	EA	6861	0%	6861	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 734
251			2 x 6 Wood Studs @ 22' L	EA	74	0%	74	0.836	\$ 43.50	\$ 36.37	\$ 34.10	\$ 70.47	\$ 5,245
252			2 x 6 Double Wooden Plate At Top @ 10' L	EA	20	0%	20	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 634
253			2 x 6 Wooden Plate At Bottom @ 10' L	EA	10	0%	10	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 317
254			R-21 Insulation	SF	2079	10%	2287	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 3,267
255			Sealant @ All Penetrations	LF	396	10%	436	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 309
256			2 x 6 Interior Stud Wall As:	SF	740	LF	51	H	14.5				
			One Layer of 5/8" Gypsum Board on Both Sides	SF	1479								
257			No of Sheets (4x8)	EA	51	0%	51	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 1,687
258			Tapping	LF	740	10%	813	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 264
259			Joint Compound	LBS	192	10%	211	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 350
260			Screws	EA	2440	0%	2440	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 261
261			2 x 6 Wood Studs @ 16' L	EA	38	0%	38	0.608	\$ 43.50	\$ 26.45	\$ 24.80	\$ 51.25	\$ 1,965
262			2 x 6 Double Wooden Plate At Top @ 10' L	EA	10	0%	10	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 327
263			2 x 6 Wooden Plate At Bottom @ 10' L	EA	5	0%	5	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 163
264			R-21 Insulation	SF	740	10%	813	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 1,162
265			Sealant @ All Penetrations	LF	204	10%	224	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 159
266			2 x 4 Interior Stud Wall As:	SF	1663	LF	175	H	9.5				
			One Layer of 5/8" Gypsum Board on Both Sides	SF	3325								
267			No of Sheets (4x8)	EA	114	0%	114	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 3,793
268			Tapping	LF	1663	10%	1829	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 593
269			Joint Compound	LBS	432	10%	475	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 787
270			Screws	EA	5486	0%	5486	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 587
271			2 x 4 Wood Studs @ 10' L	EA	132	0%	132	0.360	\$ 43.50	\$ 15.66	\$ 14.10	\$ 29.76	\$ 3,916
272			2 x 4 Double Wooden Plate At Top @ 10' L	EA	35	0%	35	0.360	\$ 43.50	\$ 15.66	\$ 14.10	\$ 29.76	\$ 1,042
273			2 x 4 Wooden Plate At Bottom @ 10' L	EA	18	0%	18	0.360	\$ 43.50	\$ 15.66	\$ 14.10	\$ 29.76	\$ 521
274			R-21 Insulation	SF	1663	10%	1829	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 2,612
275			Sealant @ All Penetrations	LF	700	10%	770	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 546

**DETAILED BREAKDOWN OF ITEMS**

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24


SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
276			2 x 4 Interior Stud Wall As:	SF	1235	LF	130	H	9.5				
			One Layer of 5/8" Gypsum Board on One Side	SF	1235								
277			No of Sheets (4x8)	EA	42	0%	42	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 1,409
278			Tapping	LF	618	10%	679	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 220
279			Joint Compound	LBS	161	10%	177	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 292
280			Screws	EA	2038	0%	2038	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 218
			One Layer of 5/8" Moisture Resistant Gypsum Board on One Side	SF	1235								
281			No of Sheets (4x8)	EA	42	0%	42	0.384	\$ 43.50	\$ 16.70	\$ 17.12	\$ 33.82	\$ 1,436
282			Tapping	LF	618	10%	679	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 220
283			Joint Compound	LBS	161	10%	177	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 292
284			Screws	EA	2038	0%	2038	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 218
285			2 x 4 Wood Studs @ 10' L	EA	98	0%	98	0.360	\$ 43.50	\$ 15.66	\$ 14.10	\$ 29.76	\$ 2,909
286			2 x 4 Double Wooden Plate At Top @ 10' L	EA	26	0%	26	0.360	\$ 43.50	\$ 15.66	\$ 14.10	\$ 29.76	\$ 774
287			2 x 4 Wooden Plate At Bottom @ 10' L	EA	13	0%	13	0.360	\$ 43.50	\$ 15.66	\$ 14.10	\$ 29.76	\$ 387
288			R-21 Insulation	SF	1235	10%	1359	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 1,941
289			Sealant @ All Penetrations	LF	520	10%	572	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 406
290			2 x 6 Interior Stud Wall As:	SF	580	LF	61	H	9.5				
			One Layer of 5/8" Gypsum Board on One Side	SF	580								
291			No of Sheets (4x8)	EA	20	0%	20	0.384	\$ 43.50	\$ 16.70	\$ 16.48	\$ 33.18	\$ 661
292			Tapping	LF	290	10%	319	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 103
293			Joint Compound	LBS	75	10%	83	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 137
294			Screws	EA	956	0%	956	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 102
			One Layer of 5/8" Moisture Resistant Gypsum Board on One Side	SF	580								
295			No of Sheets (4x8)	EA	20	0%	20	0.384	\$ 43.50	\$ 16.70	\$ 17.12	\$ 33.82	\$ 674
296			Tapping	LF	290	10%	319	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 103
297			Joint Compound	LBS	75	10%	83	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 137
298			Screws	EA	956	0%	956	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 102
299			2 x 6 Wood Studs @ 10' L	EA	46	0%	46	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 1,469
300			2 x 6 Double Wooden Plate At Top @ 10' L	EA	12	0%	12	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 391
301			2 x 6 Wooden Plate At Bottom @ 10' L	EA	6	0%	6	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 195
302			R-21 Insulation	SF	580	10%	637	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 911
303			Sealant @ All Penetrations	LF	244	10%	268	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 190
304			Parapet Wall As:	SF	950	LF	190	H	5				
			7/16" OSB Grade-1 Sheathing On Both Sides	SF	1900								
305			No of Sheets (4x8)	EA	65	0%	65	0.640	\$ 43.50	\$ 27.84	\$ 29.44	\$ 57.28	\$ 3,741
306			Screws	EA	4898	0%	4898	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 524
307			2 x 6 Wood Studs @ 8' L	EA	143	0%	143	0.304	\$ 43.50	\$ 13.22	\$ 12.40	\$ 25.62	\$ 3,661
308			2 x 6 Double Wooden Plate At Top @ 10' L	EA	38	0%	38	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 1,217
309			2 x 6 Wooden Plate At Bottom @ 10' L	EA	19	0%	19	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 609
310			R-21 Insulation	SF	950	10%	1045	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 1,493
311			Moisture Barrier	SF	950	10%	1045	0.002	\$ 43.50	\$ 0.09	\$ 0.16	\$ 0.25	\$ 258
312			Sealant @ All Penetrations	LF	380	10%	418	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 296
313			Parapet Wall As:	SF	896	LF	128	H	7				
			7/16" OSB Grade-1 Sheathing On Both Sides	SF	1792								
314			No of Sheets (4x8)	EA	62	0%	62	0.640	\$ 43.50	\$ 27.84	\$ 29.44	\$ 57.28	\$ 3,528



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023
 Scope: GC
 Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
315			Screws	EA	4620	0%	4620	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 494
316			2 x 6 Wood Studs @ 8' L	EA	96	0%	96	0.304	\$ 43.50	\$ 13.22	\$ 12.40	\$ 25.62	\$ 2,466
317			2 x 6 Double Wooden Plate At Top @ 10' L	EA	26	0%	26	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 820
318			2 x 6 Wooden Plate At Bottom @ 10' L	EA	13	0%	13	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 410
319			R-21 Insulation	SF	896	10%	986	0.011	\$ 43.50	\$ 0.48	\$ 0.95	\$ 1.43	\$ 1,408
320			Moisture Barrier	SF	896	10%	986	0.002	\$ 43.50	\$ 0.09	\$ 0.16	\$ 0.25	\$ 243
321			Sealant @ All Penetrations	LF	256	10%	282	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 200
322			Countertop Knee Wall As:	SF	45	LF	15	H	3				
			3/4" Plywood Sheathing On Both Sides	SF	90								
323			No of Sheets (4x8)	EA	3	0%	3	0.640	\$ 43.50	\$ 27.84	\$ 41.92	\$ 69.76	\$ 216
324			Screws	EA	232	0%	232	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 25
325			2 x 6 Wood Studs @ 8' L	EA	11	0%	11	0.304	\$ 43.50	\$ 13.22	\$ 12.40	\$ 25.62	\$ 289
326			2 x 6 Double Wooden Plate At Top @ 10' L	EA	3	0%	3	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 96
327			2 x 6 Wooden Plate At Bottom @ 10' L	EA	2	0%	2	0.380	\$ 43.50	\$ 16.53	\$ 15.50	\$ 32.03	\$ 48
328			Sealant @ All Penetrations	LF	60	10%	66	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 47
329			Countertop Knee Wall As:	SF	15	LF	5	H	3				
			3/4" Plywood Sheathing On Both Sides	SF	30								
330			No of Sheets (4x8)	EA	1	0%	1	0.640	\$ 43.50	\$ 27.84	\$ 41.92	\$ 69.76	\$ 72
331			Screws	EA	77	0%	77	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 8
332			2 x 4 Wood Studs @ 8' L	EA	4	0%	4	0.288	\$ 43.50	\$ 12.53	\$ 11.28	\$ 23.81	\$ 90
333			2 x 4 Double Wooden Plate At Top @ 10' L	EA	1	0%	1	0.360	\$ 43.50	\$ 15.66	\$ 14.10	\$ 29.76	\$ 30
334			2 x 4 Wooden Plate At Bottom @ 10' L	EA	1	0%	1	0.360	\$ 43.50	\$ 15.66	\$ 14.10	\$ 29.76	\$ 15
335			Sealant @ All Penetrations	LF	20	10%	22	0.014	\$ 43.50	\$ 0.61	\$ 0.10	\$ 0.71	\$ 16
			CEILING FINISHES										
			GYPSUM BOARD:										
			5/8" Gypsum Board Ceiling	SF	2573								
336			No of Sheets (4x8)	EA	88	0%	88	0.480	\$ 43.50	\$ 20.88	\$ 19.84	\$ 40.72	\$ 3,602
337			Tapping	LF	1287	10%	1415	0.007	\$ 43.50	\$ 0.30	\$ 0.02	\$ 0.32	\$ 459
338			Joint Compound	LBS	334	10%	368	0.030	\$ 43.50	\$ 1.31	\$ 0.35	\$ 1.66	\$ 609
339			Screws	EA	4245	0%	4245	0.002	\$ 43.50	\$ 0.09	\$ 0.02	\$ 0.11	\$ 454
			METAL PANELS										
340			12" Metal Soffit Panels	SF	301	10%	331	0.045	\$ 43.50	\$ 1.96	\$ 6.13	\$ 8.09	\$ 2,678
			ACT CEILING										
341			C-1 -2 x 4 Lay In Ceiling -Armstrong Acoustical Lay in Mineral Fiber Board Washable Matte White Finish W/15/16" Grid System	SF	7342	10%	8076	0.036	\$ 43.50	\$ 1.57	\$ 3.10	\$ 4.66	\$ 37,675
342			C-2 -2 x 2 Lay In Ceiling -Armstrong Acoustical Lay in Mineral Fiber Board Washable Matte White Finish W/15/16" Grid System	SF	369	10%	406	0.036	\$ 43.50	\$ 1.57	\$ 3.35	\$ 4.91	\$ 1,995
			FLOOR FINISHES										
343			T-1 -6" x 24" -Mill Pointe Carson Gray Wood Plank Ceramic Tile	SF	2192	10%	2411	0.075	\$ 46.50	\$ 3.49	\$ 3.59	\$ 7.08	\$ 17,065

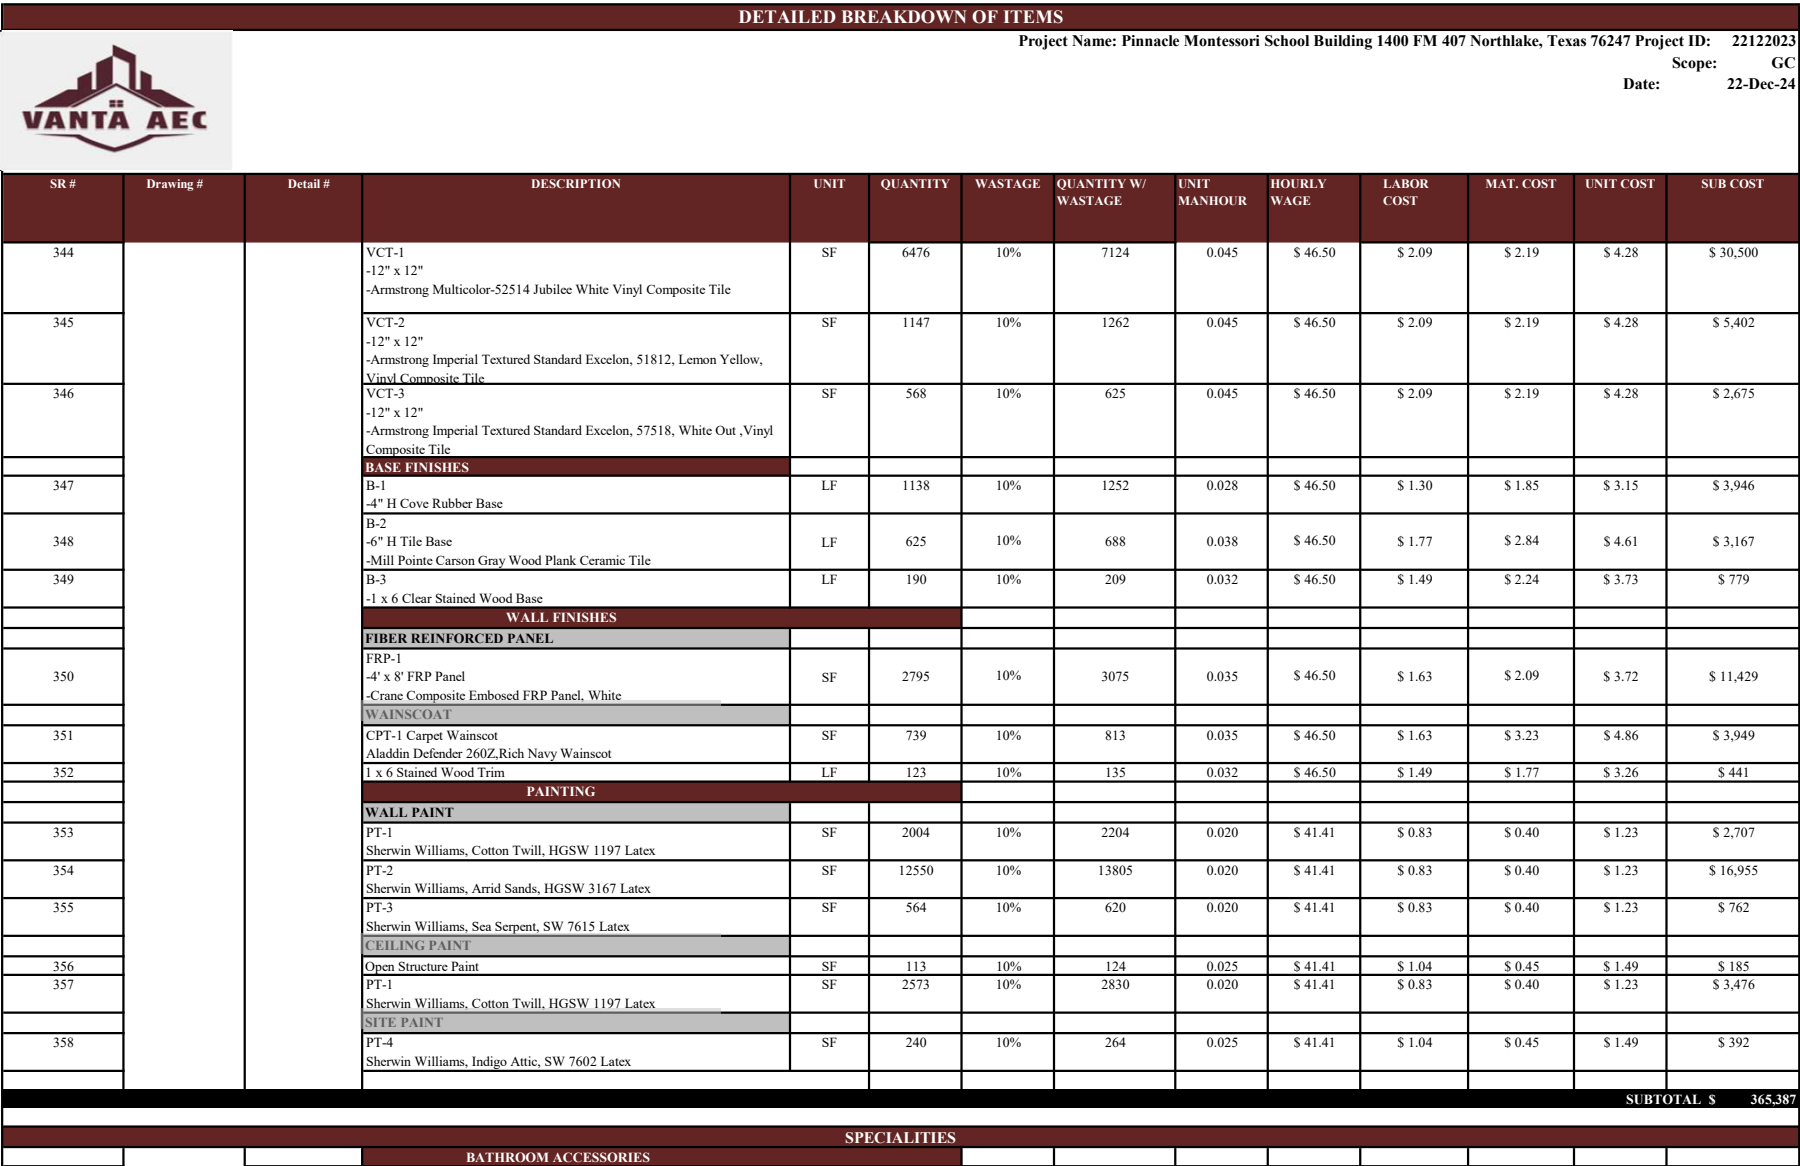



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
359	A0.00-A9.4	Plan Notes	24" x 36" Wall Mirror	EA	10	0%	10	1.250	\$ 54.50	\$ 68.13	\$ 111.00	\$ 179.13	\$ 1,791	
360			36" Grab Bar	EA	8	0%	8	0.620	\$ 54.50	\$ 33.79	\$ 38.75	\$ 72.54	\$ 580	
361			42" Grab Bar	EA	2	0%	2	0.620	\$ 54.50	\$ 33.79	\$ 42.91	\$ 76.70	\$ 153	
362			Tissue Paper Holder	EA	10	0%	10	0.550	\$ 54.50	\$ 29.98	\$ 53.42	\$ 83.40	\$ 834	
363			Sanitary Napkin Disposal	EA	10	0%	10	0.630	\$ 54.50	\$ 34.34	\$ 38.95	\$ 73.29	\$ 733	
364			Towel Paper Dispenser	EA	2	0%	2	0.600	\$ 54.50	\$ 32.70	\$ 41.25	\$ 73.95	\$ 148	
			AWNINGS											
365			Pre Finished Standing Seam Awning	SF	481	10%	529	0.350	\$ 54.50	\$ 19.08	\$ 37.13	\$ 56.21	\$ 29,738	
			CANAOOPY											
366			Pre Finished Metal Canopy	SF	101	10%	111	0.350	\$ 54.50	\$ 19.08	\$ 37.13	\$ 56.21	\$ 6,244	
			FIRE EXTINGUISHER											
367			Semi Recessed Fire Extinguisher	EA	5	0%	5	0.900	\$ 54.50	\$ 49.05	\$ 89.00	\$ 138.05	\$ 690	
SUBTOTAL \$													40,912	
EQUIPMENTS														
368	A0.00-A9.4	Plan Notes	Washer	EA	1	0%	1	3.400	\$ 54.50	\$ 185.30	\$ 384.00	\$ 569.30	\$ 569	
369			Dryer	EA	1	0%	1	3.200	\$ 54.50	\$ 174.40	\$ 340.00	\$ 514.40	\$ 514	
370			Refrigerator -By Owner	EA	1	0%	1	5.400	\$ 54.50	\$ 294.30	\$ -	\$ 294.30	\$ 294	
371			Wall Mounted TV	EA	1	0%	1	3.750	\$ 54.50	\$ 204.38	\$ 761.00	\$ 965.38	\$ 965	
SUBTOTAL \$													2,343	
FURNISHING														
372	A0.00-A9.4	Plan Notes	Plastic Laminate Countertop -Wilson Art, Natural Pear 7061	SF	298	10%	328	0.280	\$ 54.50	\$ 15.26	\$ 42.14	\$ 57.40	\$ 18,816	
373			Solid Surface Countertop	SF	17	10%	19	0.359	\$ 54.50	\$ 19.57	\$ 73.19	\$ 92.76	\$ 1,735	
			BACKSPLASH											
374			4" H Backsplash	LF	136	10%	150	0.100	\$ 54.50	\$ 5.45	\$ 9.44	\$ 14.89	\$ 2,228	
SUBTOTAL \$													22,778	
PLUMBING														
			PIPING											
			WATER PIPES											
375			3/4" Hot Water Return Pipe In 3" Dia Sleeve	LF	52	10%	57	0.110	\$ 75.30	\$ 8.28	\$ 6.02	\$ 14.30	\$ 821	
376			2" Dia Domestic Water Pipe	LF	431	10%	474	0.200	\$ 75.30	\$ 15.06	\$ 18.69	\$ 33.75	\$ 16,001	
377			1" Dia Hot Water Pipe	LF	322	10%	354	0.124	\$ 75.30	\$ 9.34	\$ 7.33	\$ 16.67	\$ 5,902	
378			3/4" Dia Hot Water Pipe	LF	85	10%	94	0.110	\$ 75.30	\$ 8.28	\$ 6.02	\$ 14.30	\$ 1,340	
379			1-1/2" Domestic Water Pipe	LF	53	10%	58	0.165	\$ 75.30	\$ 12.42	\$ 12.65	\$ 25.07	\$ 1,453	
380			1-1/4" Domestic Water Pipe	LF	20	10%	22	0.145	\$ 75.30	\$ 10.92	\$ 10.00	\$ 20.92	\$ 468	
381			1/2" Dia Hot Water Pipe	LF	91	10%	101	0.104	\$ 75.30	\$ 7.83	\$ 3.46	\$ 11.29	\$ 1,136	
382			1/2" Dia Domestic Water Pipe	LF	86	10%	94	0.104	\$ 75.30	\$ 7.83	\$ 3.46	\$ 11.29	\$ 1,063	
383			3/4" Dia Domestic Water Pipe	LF	95	10%	104	0.110	\$ 75.30	\$ 8.28	\$ 6.02	\$ 14.30	\$ 1,491	
			INSULATION											
384			1/2" Thk Premolded Fiberglass Insulation	LF	583	10%	641	0.045	\$ 75.30	\$ 3.39	\$ 1.28	\$ 4.67	\$ 2,994	



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
385	P1.0-P4.0	Plan Notes	1" Thk Premolded Fiberglass Insulation	LF	551	10%	606	0.067	\$ 75.30	\$ 5.05	\$ 1.61	\$ 6.66	\$ 4,034	
			VENT PIPES											
386			2" Dia Vent Pipe	LF	279	10%	307	0.190	\$ 75.30	\$ 14.31	\$ 4.95	\$ 19.26	\$ 5,910	
			WASTEGE PIPES											
387			4" Dia Sanitary Sewer Pipe	LF	365	10%	402	0.233	\$ 75.30	\$ 17.54	\$ 9.90	\$ 27.44	\$ 11,029	
388			2" Dia Sanitary Sewer Pipe	LF	53	10%	58	0.190	\$ 75.30	\$ 14.31	\$ 4.95	\$ 19.26	\$ 1,125	
389			3" Dia Sanitary Sewer Pipe	LF	53	10%	58	0.211	\$ 75.30	\$ 15.89	\$ 7.43	\$ 23.31	\$ 1,355	
390			6" Dia Sanitary Sewer Pipe	LF	48	10%	53	0.245	\$ 75.30	\$ 18.45	\$ 14.85	\$ 33.30	\$ 1,754	
			PLUMBING FIXTURES											
391			Water Closet -Model#2257.101	EA	10	0%	10	4.330	\$ 75.30	\$ 326.05	\$ 341.92	\$ 667.97	\$ 6,680	
392			Lavatory -Lucerne Model#0355.012	EA	10	0%	10	4.750	\$ 75.30	\$ 357.68	\$ 286.00	\$ 643.68	\$ 6,437	
393			Urinal -Model#6590.001	EA	8	0%	8	4.200	\$ 75.30	\$ 316.26	\$ 554.83	\$ 871.09	\$ 6,969	
394			Sink -Elkay #DRKAD2217C	EA	10	0%	10	5.200	\$ 75.30	\$ 391.56	\$ 951.00	\$ 1,342.56	\$ 13,426	
395			Mop Sink	EA	1	0%	1	4.500	\$ 75.30	\$ 338.85	\$ 554.00	\$ 892.85	\$ 893	
396			Floor Drain -Josam Series 3000-A	EA	13	0%	13	1.680	\$ 75.30	\$ 126.50	\$ 370.51	\$ 497.01	\$ 6,461	
397			Floor Sink -Model# 3420Y	EA	1	0%	1	4.250	\$ 75.30	\$ 320.03	\$ 584.40	\$ 904.43	\$ 904	
398			Hand Sink -Single Compartment Sink Tabco Model#FC-FM-2219-F	EA	1	0%	1	6.500	\$ 75.30	\$ 489.45	\$ 1,598.67	\$ 2,088.12	\$ 2,088	
399			Electric Water Cooler	EA	1	0%	1	7.250	\$ 75.30	\$ 545.93	\$ 1,275.00	\$ 1,820.93	\$ 1,821	
400			Box Hydrant -Woodford Model# B65	EA	1	0%	1	1.900	\$ 75.30	\$ 143.07	\$ 321.75	\$ 464.82	\$ 465	
			GAS WATER HEATER											
401			GWH -A.O Smith BTX-80 -50 Gal Storage -120V/1 PH	EA	1	0%	1	12.250	\$ 75.30	\$ 922.43	\$ 3,621.87	\$ 4,544.30	\$ 4,544	
			PUMP											
402			CP -Grundfos UP15-25 SU -Hot Water Pump -5 GPM Capacity -115/1/60 Power Supply	EA	1	0%	1	4.200	\$ 75.30	\$ 316.26	\$ 386.00	\$ 702.26	\$ 702	
SUBTOTAL \$													109,264	
HVAC														
			DUCTS											
403			18 x 18 Outside Air Duct	LF	149	10%	164	0.864	\$ 77.40	\$ 66.87	\$ 60.26	\$ 127.14	\$ 20,906	
404			10" Dia Flexible Duct	LF	353	10%	388	0.151	\$ 77.40	\$ 11.67	\$ 6.07	\$ 17.73	\$ 6,878	
405			8" Dia Flexible Duct	LF	340	10%	374	0.121	\$ 77.40	\$ 9.33	\$ 4.85	\$ 14.19	\$ 5,305	
406			6" Dia Flexible Duct	LF	54	10%	59	0.090	\$ 77.40	\$ 7.00	\$ 3.64	\$ 10.64	\$ 629	
407			12" Dia Flexible Duct	LF	122	10%	135	0.181	\$ 77.40	\$ 14.00	\$ 7.28	\$ 21.28	\$ 2,863	
408			16" Dia Return Air Duct	LF	39	10%	43	0.603	\$ 77.40	\$ 46.66	\$ 24.27	\$ 70.93	\$ 3,074	
409			18/18 Return Air Duct	LF	32	10%	35	0.864	\$ 77.40	\$ 66.87	\$ 60.26	\$ 127.14	\$ 4,513	



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
410			14" Dia Return Air Duct	LF	84	10%	93	0.528	\$ 77.40	\$ 40.83	\$ 21.23	\$ 62.06	\$ 5,757
411			12" Dia Return Air Duct	LF	22	10%	24	0.452	\$ 77.40	\$ 35.00	\$ 18.20	\$ 53.20	\$ 1,259
412			18 x 20 Supply Air Duct	LF	33	10%	37	0.912	\$ 77.40	\$ 70.59	\$ 66.96	\$ 137.55	\$ 5,031
413			18 x 20 Return Air Duct	LF	36	10%	40	0.912	\$ 77.40	\$ 70.59	\$ 66.96	\$ 137.55	\$ 5,497
414			18 x 24 Rectangular Duct	LF	36	10%	40	1.008	\$ 77.40	\$ 78.02	\$ 80.35	\$ 158.37	\$ 6,285
415			14 x 12 Rectangular Duct	LF	6	10%	7	0.624	\$ 77.40	\$ 48.30	\$ 31.25	\$ 79.55	\$ 532
416			18 x 18 Return Air Duct	LF	33	10%	36	0.864	\$ 77.40	\$ 66.87	\$ 60.26	\$ 127.14	\$ 4,591
417			18 x 16 Supply Air Duct	LF	23	10%	25	0.816	\$ 77.40	\$ 63.16	\$ 53.57	\$ 116.73	\$ 2,925
418			12 x 12 Rectangular Duct	LF	28	10%	31	0.576	\$ 77.40	\$ 44.58	\$ 26.78	\$ 71.37	\$ 2,217
419			14 x 12 Rectangular Duct	LF	10	10%	11	0.624	\$ 77.40	\$ 48.30	\$ 31.25	\$ 79.55	\$ 910
420			16 x 14 Supply Air Duct	LF	36	10%	40	0.720	\$ 77.40	\$ 55.73	\$ 41.66	\$ 97.39	\$ 3,874
421			1" Dia Condensate Pipe	LF	109	10%	120	0.124	\$ 77.40	\$ 9.60	\$ 7.33	\$ 16.93	\$ 2,029
422			18 x 18 Relief Air Duct	LF	95	10%	105	0.864	\$ 77.40	\$ 66.87	\$ 60.26	\$ 127.14	\$ 13,343
423			8" Dia Exhaust Duct	LF	7	10%	7	0.301	\$ 77.40	\$ 23.33	\$ 12.13	\$ 35.46	\$ 259
			INSULATION										
424			1-1/2" Acoustical Duct Liner	SF	2782	10%	3060	0.062	\$ 77.40	\$ 4.80	\$ 0.92	\$ 5.72	\$ 17,501
425			2" Thk Fiberglass Duct Insulation	SF	2643	10%	2907	0.045	\$ 77.40	\$ 3.48	\$ 1.12	\$ 4.60	\$ 13,382
			AIR DEVICES										
426			Titus TMS , 24 x 24 Supply Diffuser CFM : 365	EA	24	0%	24	2.820	\$ 77.40	\$ 218.27	\$ 255.50	\$ 473.77	\$ 11,370
427			Titus TMS , 24 x 24 Supply Diffuser CFM : 275	EA	4	0%	4	2.420	\$ 77.40	\$ 187.31	\$ 220.00	\$ 407.31	\$ 1,629
428			Titus TMS , 24 x 24 Supply Diffuser CFM : 200	EA	1	0%	1	1.760	\$ 77.40	\$ 136.22	\$ 160.00	\$ 296.22	\$ 296
429			Titus TMS , 24 x 24 Supply Diffuser CFM : 250	EA	2	0%	2	2.200	\$ 77.40	\$ 170.28	\$ 200.00	\$ 370.28	\$ 741
430			Titus TMS , 24 x 24 Supply Diffuser CFM : 350	EA	2	0%	2	2.700	\$ 77.40	\$ 208.98	\$ 245.00	\$ 453.98	\$ 908
431			Titus TMS , 24 x 24 Supply Diffuser CFM : 165	EA	2	0%	2	1.460	\$ 77.40	\$ 113.00	\$ 132.00	\$ 245.00	\$ 490
432			Titus PAS , 24 x 12 Supply Diffuser CFM : 100	EA	9	0%	9	0.880	\$ 77.40	\$ 68.11	\$ 80.00	\$ 148.11	\$ 1,333
433			Titus TDC , 12 x 12 Supply Diffuser Border Type 1 CFM : 100	EA	3	0%	3	0.880	\$ 77.40	\$ 68.11	\$ 80.00	\$ 148.11	\$ 444
434			Titus TDC , 12 x 12 Supply Diffuser Border Type 1 CFM : 215	EA	7	0%	7	1.900	\$ 77.40	\$ 147.06	\$ 172.00	\$ 319.06	\$ 2,233
435			Titus PAR , 24 x 24 Perforated Return Grille CFM : 600	EA	17	0%	17	3.630	\$ 77.40	\$ 280.96	\$ 330.00	\$ 610.96	\$ 10,386
436			Titus PAR , 24 x 24 Perforated Return Grille CFM : 350	EA	2	0%	2	2.700	\$ 77.40	\$ 208.98	\$ 245.00	\$ 453.98	\$ 908
437			Titus PAR , 24 x 24 Perforated Return Grille CFM : 330	EA	1	0%	1	2.550	\$ 77.40	\$ 197.37	\$ 231.00	\$ 428.37	\$ 428
438			Titus PAR , 24 x 24 Perforated Return Grille CFM : 220	EA	1	0%	1	1.940	\$ 77.40	\$ 150.16	\$ 176.00	\$ 326.16	\$ 326
439			Titus PAR , 24 x 24 Perforated Return Grille CFM : 250	EA	1	0%	1	2.200	\$ 77.40	\$ 170.28	\$ 200.00	\$ 370.28	\$ 370
440			Titus PAR , 24 x 12 Perforated Return Grille	EA	1	0%	1	1.760	\$ 77.40	\$ 136.22	\$ 160.00	\$ 296.22	\$ 296
441			Titus PAR , 12 x 12 Perforated Return Grille	EA	4	0%	4	1.320	\$ 77.40	\$ 102.17	\$ 120.00	\$ 222.17	\$ 889
442			Titus PAR , 24 x 24 Perforated Return Grille CFM : 1000	EA	3	0%	3	3.850	\$ 77.40	\$ 297.99	\$ 350.00	\$ 647.99	\$ 1,944




DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
443	M2.1-M4.3	Plan Notes	Titus TMRA, Round Ceiling Supply Diffuser 12" Dia Neck CFM : 500	EA	6	0%	6	3.300	\$ 77.40	\$ 255.42	\$ 300.00	\$ 555.42	\$ 3,333
			EXHAUST FAN										
444			Exhaust Fan -100 CFM -950 RPM -120V/1 Ph Weight 10Lbs	EA	12	0%	12	4.260	\$ 77.40	\$ 329.72	\$ 867.95	\$ 1,197.67	\$ 14,372
			ELECTRIC UNIT HEATER										
445			Electric Unit Heater -400 CFM -Trane UHEC-05 -208 V/3 Ph /35A Weight 50Lbs	EA	12	0%	12	5.200	\$ 77.40	\$ 402.48	\$ 767.00	\$ 1,169.48	\$ 14,034
446			Electric Unit Heater -350 CFM -Qmark MUH05 -208 V/3 Ph Weight 50Lbs	EA	8	0%	8	5.200	\$ 77.40	\$ 402.48	\$ 566.00	\$ 968.48	\$ 7,748
			INDOOR HEAT PUMP										
447			AHU -4 TON -1600 Airflow CFM -Trane GAM5BOC48M41SB 208V/1 Ph	EA	2	0%	2	12.200	\$ 77.40	\$ 944.28	\$ 6,100.00	\$ 7,044.28	\$ 14,089
448			AHU -5 TON -2000 Airflow CFM -Trane TWE06043B 208V/3 Ph	EA	1	0%	1	15.250	\$ 77.40	\$ 1,180.35	\$ 7,625.00	\$ 8,805.35	\$ 8,805
449			AHU -6 TON -2400 Airflow CFM -Trane TWE07243B 208V/3 Ph	EA	4	0%	4	18.300	\$ 77.40	\$ 1,416.42	\$ 9,150.00	\$ 10,566.42	\$ 42,266
450			AHU -7.5 TON -3000 Airflow CFM -Trane TWE09043B 208V/3 Ph	EA	1	0%	1	22.875	\$ 77.40	\$ 1,770.53	\$ 11,437.50	\$ 13,208.03	\$ 13,208
			OUTDOOR HEAT PUMP										
451			HP -47000 BTUH -Trane 4TWA4048A3000A 208V/3 Ph	EA	2	0%	2	7.600	\$ 77.40	\$ 588.24	\$ 3,800.00	\$ 4,388.24	\$ 8,776
452			HP -77000 BTUH -Trane TWA072430 208V/3 Ph	EA	1	0%	1	12.451	\$ 77.40	\$ 963.71	\$ 6,225.53	\$ 7,189.24	\$ 7,189

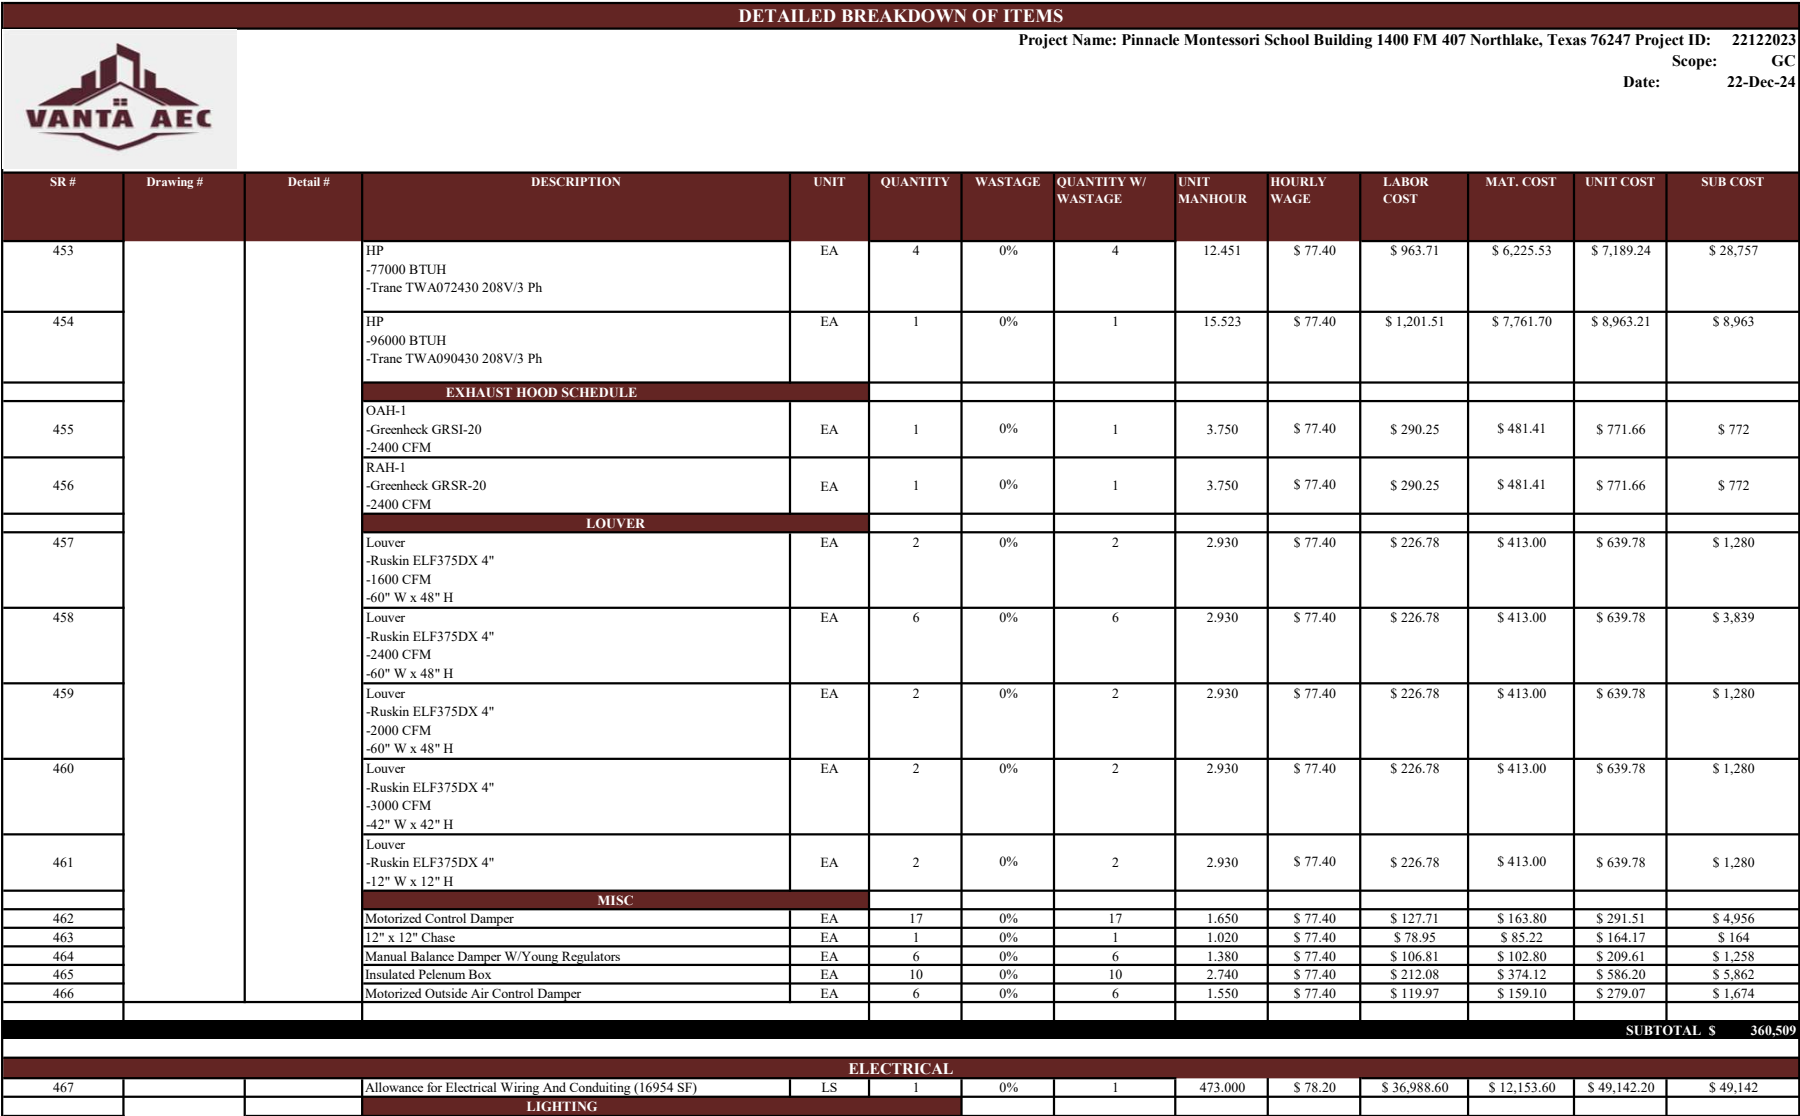



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023
 Scope: GC
 Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
468			Tag A -CREE Z-24-D-50L-835-CV-UNV-10V5 -2 X 4 LED TOFFER -5000 LUMENS -120/277V -35 WATT	EA	60	0%	60	1.430	\$ 78.20	\$ 111.83	\$ 129.41	\$ 241.24	\$ 14,474
469			Tag A1 -CREE Z-24-D-50L-835-CV-UNV-10V5-DGA24-WHT -2 X 4 LED TOFFER -4268 LUMENS -120/277V -35 WATT	EA	12	0%	12	2.090	\$ 78.20	\$ 163.44	\$ 189.95	\$ 353.39	\$ 4,241
470			Tag A2 -CREE Z-22-D-26L-835-CV-UNV-10V5 -2 X 2 LED TOFFER -2600 LUMENS -120/277V -18 WATT	EA	8	0%	8	1.360	\$ 78.20	\$ 106.35	\$ 122.86	\$ 229.21	\$ 1,834
471			Tag B -6" DOWNLIGHT -VANTAGE A6VOFLED-U-1100-35K-M6060-SGC-ZDM -1106 LUMENS 120/277V 13.5 WATT	EA	35	0%	35	0.710	\$ 78.20	\$ 55.52	\$ 63.91	\$ 119.43	\$ 4,180
472			Tag C1 -PENDANT LIGHT -KENALL SPG18-PM-MW-5N-SU-TA-30L-35K8-DCC-DV 120/277V 35 WATT	EA	10	0%	10	1.190	\$ 78.20	\$ 93.06	\$ 108.12	\$ 201.18	\$ 2,012
473			Tag BE -6" DOWNLIGHT -VANTAGE A6VOFLED-U-1100-35K-M6060-SGC-ZDM-EM17 -1106 LUMENS 120/277V 13.5 WATT	EA	10	0%	10	0.710	\$ 78.20	\$ 55.52	\$ 63.91	\$ 119.43	\$ 1,194
474			Tag DE -XTRALIGHT SPS-4-3000L-35K-DIM-SQ-WG 4' SLIM PROFILE STRIP -3000 LUMENS -120/277V -22 WATT	EA	2	0%	2	1.620	\$ 78.20	\$ 126.68	\$ 146.91	\$ 273.59	\$ 547
475			Tag C2 -PENDANT LIGHT -KENALL SPG18-PM-MW-5N-SU-TA-30L-35K8-DCC-DV 120/277V 100 WATT	EA	10	0%	10	1.190	\$ 78.20	\$ 93.06	\$ 108.12	\$ 201.18	\$ 2,012



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
476	E1.1-E5.0	Plan Notes	Tag X1 -ISOLITE RL-EM-R-U-WH-MTEB COMBO LED EXIT SIGN AND EMERGENCY LIGHT -120V/5 WATT	EA	12	0%	12	0.700	\$ 78.20	\$ 54.74	\$ 63.35	\$ 118.09	\$ 1,417
477			Tag X -ISOLITE RL-EM-R-U-WH-MTEB LED EXIT SIGN -120V/5 WATT	EA	12	0%	12	0.700	\$ 78.20	\$ 54.74	\$ 63.35	\$ 118.09	\$ 1,417
478			Tag D -XTRALIGHT SPS-4-3000L-35K-DIM-SQ 4' SLIM PROFILE STRIP -3000 LUMENS -120/277V -22 WATT	EA	1	0%	1	1.350	\$ 78.20	\$ 105.57	\$ 121.91	\$ 227.48	\$ 227
479			Tag EE -FC LIGHTING FCW1084-UNV-840-11L-BKE-ASY	EA	14	0%	14	2.560	\$ 78.20	\$ 200.19	\$ 284.00	\$ 484.19	\$ 6,779
480			Tag EE1 -FC LIGHTING FCW1084-UNV-840-6L-BKE-ASY	EA	5	0%	5	2.560	\$ 78.20	\$ 200.19	\$ 284.00	\$ 484.19	\$ 2,421
481			Tag G1 -FC LIGHTING FCW1029-UNV-4K-CRI85-30L-WHE-WFL-LD	EA	6	0%	6	2.500	\$ 78.20	\$ 195.50	\$ 277.00	\$ 472.50	\$ 2,835
482			Tag J -FLC3D-RO-SW-700L-120-L11-T-OD-LC3-RO-700L-40K-DNS-WFL-C- NP-X	EA	4	0%	4	0.910	\$ 78.20	\$ 71.16	\$ 82.50	\$ 153.66	\$ 615
483			Tag K1 -SOLAIS GL1-2-4S-740-STD-10-WP	EA	4	0%	4	4.840	\$ 78.20	\$ 378.49	\$ 968.00	\$ 1,346.49	\$ 5,386
484			Tag SP3B -CREE OSQ-M-16L-40K7-33-UL-OSQ-CA-DA	EA	1	0%	1	6.650	\$ 78.20	\$ 520.03	\$ 1,329.95	\$ 1,849.98	\$ 1,850
485			Tag SP5 -CREE OSQ-M-16L-40K7-33-UL-OSQ-CA-DA	EA	4	0%	4	6.650	\$ 78.20	\$ 520.03	\$ 1,329.95	\$ 1,849.98	\$ 7,400
			LIGHTING CONTROL										
486			1 Pole Wall Mounted Occupancy Sensor	EA	7	0%	7	1.210	\$ 78.20	\$ 94.62	\$ 47.25	\$ 141.87	\$ 993
487			2 Pole Wall Mounted Occupancy Sensor	EA	10	0%	10	1.280	\$ 78.20	\$ 100.10	\$ 51.90	\$ 152.00	\$ 1,520
488			Single Pole Switch	EA	42	0%	42	0.555	\$ 78.20	\$ 43.40	\$ 18.50	\$ 61.90	\$ 2,600
489			Thermal Overload Switch	EA	1	0%	1	1.147	\$ 78.20	\$ 89.71	\$ 38.24	\$ 127.95	\$ 128
490			Three Way Switch	EA	2	0%	2	0.984	\$ 78.20	\$ 76.95	\$ 32.80	\$ 109.75	\$ 219
491			Dimmer Switch	EA	6	0%	6	1.084	\$ 78.20	\$ 84.76	\$ 36.13	\$ 120.89	\$ 725
			DISTRIBUTION SYSTEM										
492			Panel A -208Y/120V , 3 Phase , 4 Wire , 400 A	EA	1	0%	1	6.750	\$ 78.20	\$ 527.85	\$ 1,280.00	\$ 1,807.85	\$ 1,808
493			Panel B -208Y/120V , 3 Phase , 4 Wire , 200 A	EA	1	0%	1	4.500	\$ 78.20	\$ 351.90	\$ 820.00	\$ 1,171.90	\$ 1,172
494			Panel H -208Y/120V , 3 Phase , 4 Wire , 100 A	EA	1	0%	1	4.200	\$ 78.20	\$ 328.44	\$ 374.00	\$ 702.44	\$ 702
			POWER										
495			Duplex Receptacle	EA	88	0%	88	0.610	\$ 78.20	\$ 47.69	\$ 20.33	\$ 68.02	\$ 5,986
496			Smoke Detector	EA	14	0%	14	1.280	\$ 78.20	\$ 100.10	\$ 52.19	\$ 152.29	\$ 2,132
497			Telephone Outlet	EA	9	0%	9	0.492	\$ 78.20	\$ 38.47	\$ 16.40	\$ 54.87	\$ 494
498			Tele Data Outlet	EA	9	0%	9	0.492	\$ 78.20	\$ 38.47	\$ 16.40	\$ 54.87	\$ 494
499			Quad Receptacle	EA	4	0%	4	0.924	\$ 78.20	\$ 72.26	\$ 30.80	\$ 103.06	\$ 412
500			Non Fused Disconnect Switch 30/3	EA	1	0%	1	1.672	\$ 78.20	\$ 130.75	\$ 139.33	\$ 270.08	\$ 270


**DETAILED BREAKDOWN OF ITEMS**

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
501			Nema 60/F/3 Switch (35A Class J)	EA	12	0%	12	2.270	\$ 78.20	\$ 177.50	\$ 189.15	\$ 366.65	\$ 4,400
502			Nema 60/F/2 Switch (45A Class J)	EA	2	0%	2	1.865	\$ 78.20	\$ 145.83	\$ 155.40	\$ 301.23	\$ 602
503			Nema 30/F/3 Switch (30A Class J)	EA	2	0%	2	1.672	\$ 78.20	\$ 130.75	\$ 139.33	\$ 270.08	\$ 540
												SUBTOTAL \$	135,181
ELECTRONIC SAFETY AND SECURITY													
	E1.1-E5.0	Plan Notes	FIRE ALARM CONTROL										
504			Fire Alarm And Voice Evacuation System	EA	1	0%	1	16.500	\$ 78.20	\$ 1,290.30	\$ 4,342.90	\$ 5,633.20	\$ 5,633
504			Fire Alarm Control Panel	EA	2	0%	2	6.500	\$ 78.20	\$ 508.30	\$ 1,350.00	\$ 1,858.30	\$ 3,717
505			Strobe Unit	EA	11	0%	11	1.050	\$ 78.20	\$ 82.11	\$ 41.09	\$ 123.20	\$ 1,355
506			Strobe Unit W/Horn And Speaker	EA	2	0%	2	1.320	\$ 78.20	\$ 103.22	\$ 63.40	\$ 166.62	\$ 333
507			Fire Alarm Manual Pull Station	EA	18	0%	18	1.090	\$ 78.20	\$ 85.24	\$ 44.20	\$ 129.44	\$ 2,330
												SUBTOTAL \$	13,368
EARTHWORK													
	C0.00-IR2.01	Plan Notes	EROSION AND SEDIMENT CONTROL										
			SILT FENCE										
508			Woven Wire Filter Fabric Silt Fence (36" H) -Steel Posts @ 6' H (199 Posts) -Wire Mesh W1.4 x W1.4	LF	1192	10%	1311	0.036	\$ 47.00	\$ 1.69	\$ 0.76	\$ 2.45	\$ 3,215
509			Trenching For Silt Fence (6" W x 6" D x 1192' L)	CY	11	10%	12	0.650	\$ 47.00	\$ 30.55	\$ -	\$ 30.55	\$ 371
			TEMPORARY CONSTRUCTION ENTRANCE										
510			Stabilized Construction Entrance -6" Thk Layer Of 3'-5' Coarse Aggregates -Filter Fabric On Entrance	SF	680	10%	748	0.014	\$ 47.00	\$ 0.66	\$ 1.00	\$ 1.66	\$ 1,240
			INLET PROTECTION										
511			Inlet Protection -Sand Bags Placed On Top And Along Front Of Inlet @ 3' O.C	EA	3	0%	3	1.250	\$ 47.00	\$ 58.75	\$ 92.80	\$ 151.55	\$ 455
												SUBTOTAL \$	5,281
EXTERIOR IMPROVEMENTS													
			PAVEMENTS AND SIDEWALKS										
			CONCRETE PAVEMENT & SIDEWALK										
512			7" Thk Concrete Pavement (Fire lane) -3500 PSI Strength	SF	14760	10%	16236	0.060	\$ 47.00	\$ 2.84	\$ 5.73	\$ 8.57	\$ 139,118
513			#4 Bar @ 18" O.C E.W	LBS	13146	10%	14461	0.015	\$ 47.00	\$ 0.71	\$ 0.98	\$ 1.69	\$ 24,367
514			Construction Joint As #4 Bar @ 24" O.C E.W	LF	1476	10%	1624	0.055	\$ 47.00	\$ 2.59	\$ 1.70	\$ 4.29	\$ 6,957
515			Compacted Subgrade	SF	14760	10%	16236	0.005	\$ 47.00	\$ 0.24	\$ -	\$ 0.24	\$ 3,815
516			6" Thk Concrete Pavement (Non Fire Lane) -3500 PSI Strength	SF	9843	10%	10827	0.052	\$ 47.00	\$ 2.44	\$ 4.91	\$ 7.34	\$ 79,521
517			#3 Bar @ 18" O.C E.W	LBS	4935	10%	5428	0.015	\$ 47.00	\$ 0.71	\$ 0.98	\$ 1.69	\$ 9,146
518			Construction Joint As #4 Bar @ 24" O.C E.W	LF	984	10%	1083	0.055	\$ 47.00	\$ 2.59	\$ 1.70	\$ 4.29	\$ 4,639
519			Compacted Subgrade	SF	9843	10%	10827	0.005	\$ 47.00	\$ 0.24	\$ -	\$ 0.24	\$ 2,544

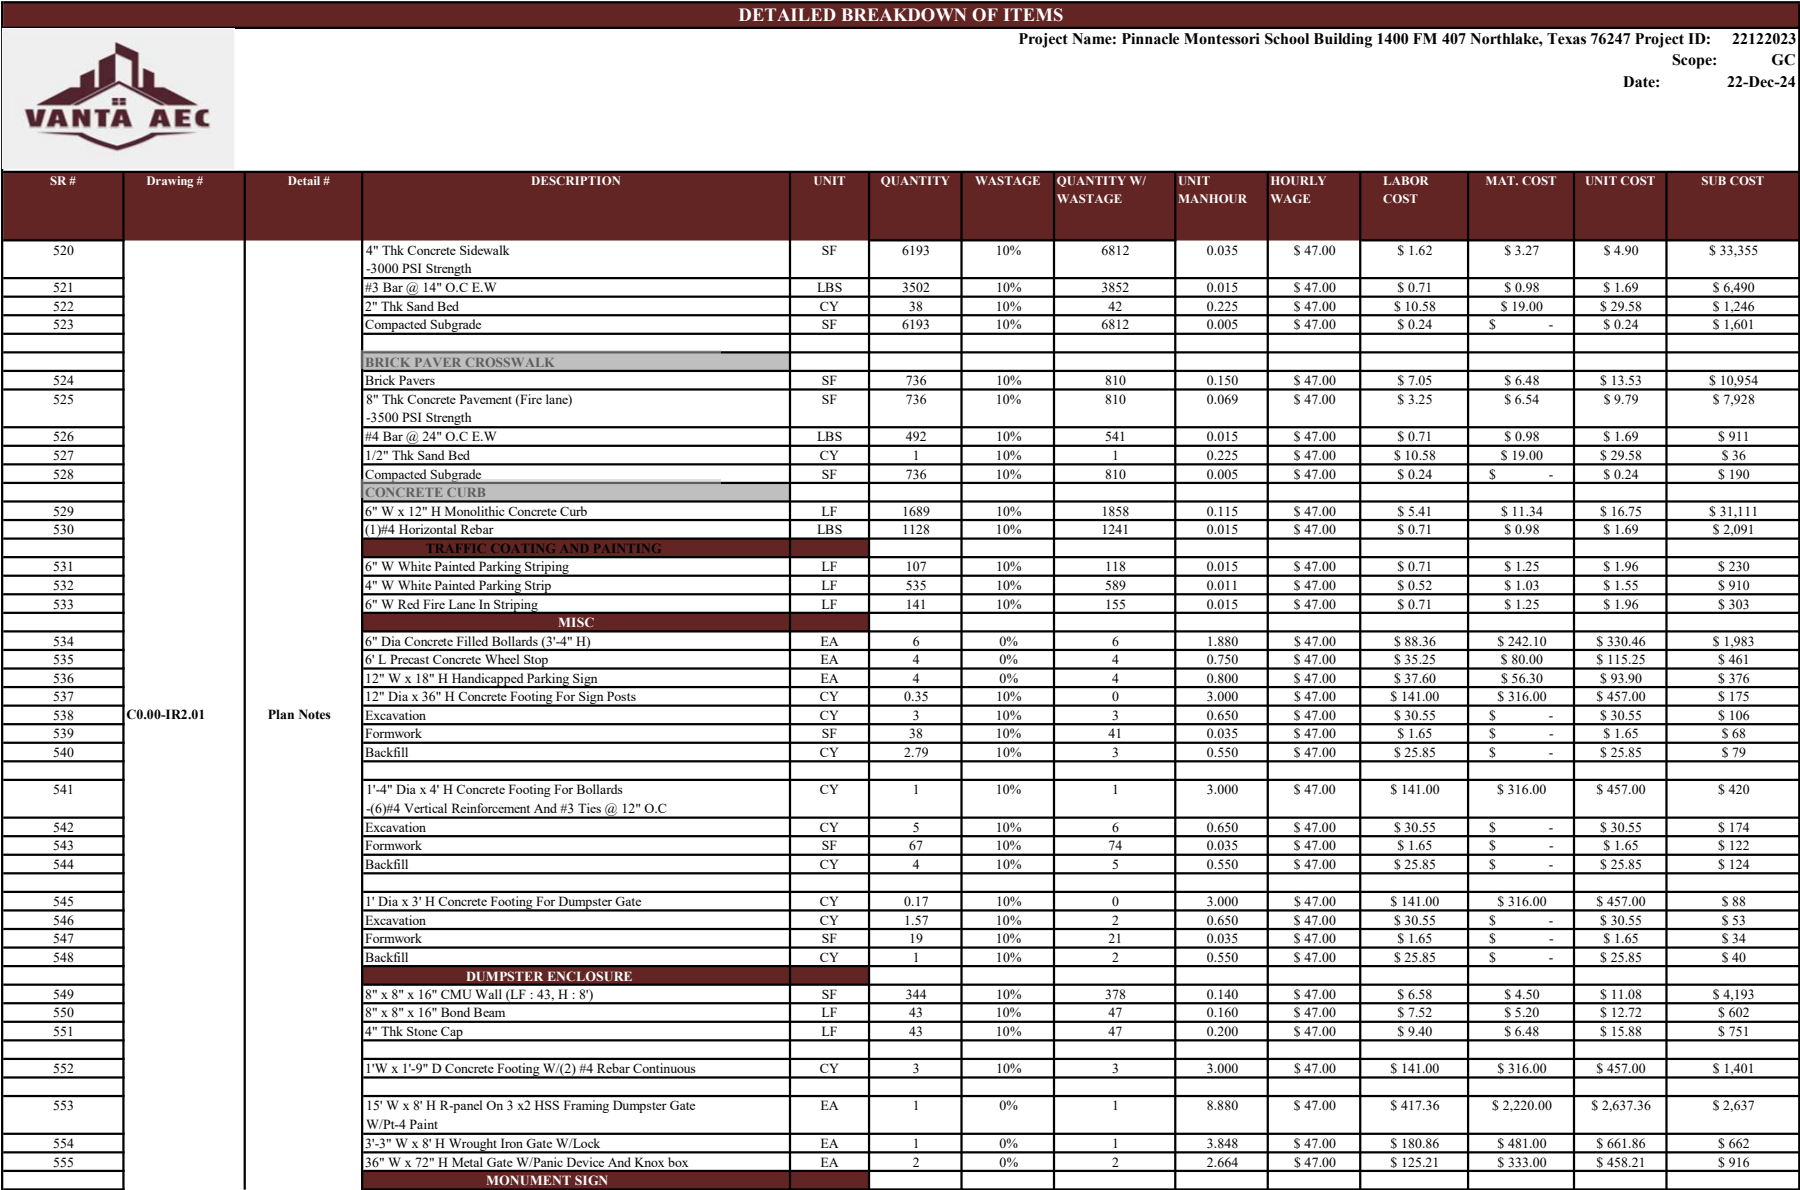



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
556			8" x 8" x 16" CMU Wall (LF : 11, H : 9')	SF	99	10%	109	0.140	\$ 47.00	\$ 6.58	\$ 4.50	\$ 11.08	\$ 1,207
557			4" Thk Stone Cap	LF	22	10%	24	0.200	\$ 47.00	\$ 9.40	\$ 6.48	\$ 15.88	\$ 384
558			4"W x 1'-0" D x 10'-8" L Concrete Footing W/#4 Bar @ 24" O.C E.W	CY	2	10%	2	3.000	\$ 47.00	\$ 141.00	\$ 316.00	\$ 457.00	\$ 795
			DECORATIVE METAL FENCES AND GATES										
559			Wrought Iron Fence (6' H) -5/8" Square 18 Gauge Steel Tubing Pickets @ 3" O.C -1-1/4" Square 16 Gauge Steel Tubing Top And Bottom Rail	LF	501	10%	551	0.105	\$ 47.00	\$ 4.94	\$ 12.83	\$ 17.77	\$ 9,790
560			2-1/2" Square Steel Tubing Posts @ 8' O.C	EA	63	0%	63	0.250	\$ 47.00	\$ 11.75	\$ 37.22	\$ 48.97	\$ 3,067
561			6" Dia X 24" H Concrete Footing For Posts	CY	1	10%	1	3.000	\$ 47.00	\$ 141.00	\$ 316.00	\$ 457.00	\$ 460
562			Excavation	CY	23	10%	25	0.650	\$ 47.00	\$ 30.55	\$ -	\$ 30.55	\$ 769
563			Formwork	SF	198	10%	218	0.035	\$ 47.00	\$ 1.65	\$ -	\$ 1.65	\$ 358
564			Backfill	CY	22	10%	24	0.550	\$ 47.00	\$ 25.85	\$ -	\$ 25.85	\$ 625
			Note: Apply One Prime Coat And One Finish Of Rust Brown Satin Finish (Sinclair 280-V Mohawk)										
			LANDSCAPING										
			TREES										
565			Botanic Name: Quercus Buckley Common Name: Texas Red Oak Size: 4-4.5" Cal	EA	8	0%	8	3.750	\$ 47.00	\$ 176.25	\$ 198.00	\$ 374.25	\$ 2,994
566			Botanic Name: Ulmus Crassifolia Common Name: Cedar Elm Size: 4-4.5" Cal	EA	20	0%	20	3.750	\$ 47.00	\$ 176.25	\$ 229.30	\$ 405.55	\$ 8,111
567			Botanic Name: Pistacia Chinensis Common Name: Chinese Pistacio Size: 4-4.5" Cal	EA	9	0%	9	3.750	\$ 47.00	\$ 176.25	\$ 259.99	\$ 436.24	\$ 3,926
			ORNAMENTAL DECIDUOUS TREES										
568			Botanic Name: Prunus Mexicana Common Name: Mexican Plum Size: 2-2.5" Cal	EA	13	0%	13	2.840	\$ 47.00	\$ 133.48	\$ 179.00	\$ 312.48	\$ 4,062
569			Botanic Name: Ilex x Atenuata Fosteri Common Name: Fosters Holly Size: 2-2.5" Cal	EA	10	0%	10	2.840	\$ 47.00	\$ 133.48	\$ 192.00	\$ 325.48	\$ 3,255
			SHRUBS										
570			Botanic Name: Eleagnus Pungens Frutlandil Common Name: Elaeagnus Size: 7 Gal	EA	40	0%	40	0.375	\$ 47.00	\$ 17.63	\$ 82.10	\$ 99.73	\$ 3,989
571			Botanic Name: Malvaviscus drummondil Common Name: Turks Cap Size: 7 Gal	EA	10	0%	10	0.375	\$ 47.00	\$ 17.63	\$ 26.25	\$ 43.88	\$ 439
572			Botanic Name: Myrica Pussila Common Name: Dwarf Wax Myrtle Size: 7 Gal	EA	53	0%	53	0.375	\$ 47.00	\$ 17.63	\$ 49.98	\$ 67.61	\$ 3,583
573			Botanic Name: Leucophyllum Frutescens Compada Common Name: Dwarf Texas Sage Size: 7 Gal	EA	63	0%	63	0.375	\$ 47.00	\$ 17.63	\$ 38.00	\$ 55.63	\$ 3,504
574	C0.00-IR2.01	Plan Notes	Botanic Name: Abelia x Grandiflora Rose Creek Common Name: Dwarf Abelia Rose Creek Size: 7 Gal	EA	49	0%	49	0.375	\$ 47.00	\$ 17.63	\$ 69.95	\$ 87.58	\$ 4,291



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
575	C0.00-IR2.01	Plan Notes	Botanic Name: Salvia Gregli Common Name: Autumn Sage Size: 5 Gal	EA	24	0%	24	0.320	\$ 47.00	\$ 15.04	\$ 35.00	\$ 50.04	\$ 1,201
			PERENNIALS										
576			Botanic Name: Salvia Farinacea Common Name: Mealy Blue Sage Size: 3 Gal	EA	62	0%	62	0.288	\$ 47.00	\$ 13.54	\$ 14.98	\$ 28.52	\$ 1,768
			ORNAMENTAL GRASS										
577			Botanic Name: Calamagrostic Acutiflora Karl Foerster Common Name: Foersters Feather Reed Grass Size: 3 Gal	EA	60	0%	60	0.288	\$ 47.00	\$ 13.54	\$ 34.14	\$ 47.68	\$ 2,861
			GROUNDCOVERS										
578			Botanic Name: Euonymus Fortunei Colotara Common Name: Wintercreeper (SF : 1767)	EA	357	0%	357	0.175	\$ 47.00	\$ 8.23	\$ 6.99	\$ 15.22	\$ 5,432
579			Botanic Name: Rosmarinus Prostrata Common Name: Creeping Rosemary (SF : 486)	EA	38	0%	38	0.175	\$ 47.00	\$ 8.23	\$ 10.99	\$ 19.22	\$ 730
580			Botanic Name: Liriope Muscari Silvery Sunproof Common Name: Silvery Sunproof Liriope (SF : 150)	EA	69	0%	69	0.175	\$ 47.00	\$ 8.23	\$ 5.25	\$ 13.48	\$ 930
581			Common Name: Common Bermuda	SF	31884	10%	35072	0.012	\$ 47.00	\$ 0.56	\$ 0.46	\$ 1.03	\$ 36,089
			INERT MATERIAL										
582			Decomposed Granite	SF	726	10%	799	0.008	\$ 47.00	\$ 0.38	\$ 0.75	\$ 1.13	\$ 899
			MULCHING										
583			3" D Hardwood Bark Mulching	SF	38596	10%	42456	0.008	\$ 47.00	\$ 0.38	\$ 1.17	\$ 1.55	\$ 65,636
			TOPSOILING										
584			Top soiling -3" D Mixed Soil W/Compost	SF	38596	10%	42456	0.009	\$ 47.00	\$ 0.42	\$ 0.18	\$ 0.60	\$ 25,428
			MISC										
585			3" Thk Course Of Compacted Stone Below Playground Turf Area	SF	2269	10%	2496	0.004	\$ 47.00	\$ 0.20	\$ 0.36	\$ 0.55	\$ 1,376
	C0.00-IR2.01	Plan Notes	IRRIGATION										
			PIPES										
586			Two 4" Dia Sleeve Pipes (Class 200)	LF	48	10%	53	0.151	\$ 47.00	\$ 7.08	\$ 3.07	\$ 10.14	\$ 535
587			3/4" Dia Class 200 PVC Mainline Pipe	LF	641	10%	705	0.028	\$ 47.00	\$ 1.33	\$ 0.58	\$ 1.90	\$ 1,341
588			1-1/2" Dia Class 200 PVC Mainline Pipe	LF	389	10%	428	0.056	\$ 47.00	\$ 2.65	\$ 1.15	\$ 3.80	\$ 1,629
589			1/2" Dia Class 200 PVC Mainline Pipe	LF	266	10%	292	0.019	\$ 47.00	\$ 0.88	\$ 0.38	\$ 1.27	\$ 370
590			3/4" Dia Class 200 PVC Lateral Pipe	LF	1154	10%	1270	0.028	\$ 47.00	\$ 1.33	\$ 0.58	\$ 1.90	\$ 2,416
591			1/2" Dia Class 200 PVC Lateral Pipe	LF	1306	10%	1437	0.019	\$ 47.00	\$ 0.88	\$ 0.38	\$ 1.27	\$ 1,822
			MISC										
592			Allowance For Netafim Techline TLHCVXR5-12 Drip Tube (SF : 4651) -2" Below Top Of Soil Mix In Shrub Bed -Drip Tube W/Pre Installed 55 GPH Drip Emitters @ 12" Interval Installed In Center Fed Grids W/Rows @ 18"	LS	1	0%	1	6.500	\$ 47.00	\$ 305.50	\$ 507.69	\$ 813.19	\$ 813
593			Hunter Pros-06-NSI PRS30 Series Pop Up Spray Heads/ Stream Bubbler Nozzle	EA	61	0%	61	0.200	\$ 47.00	\$ 9.40	\$ 14.97	\$ 24.37	\$ 1,487
594			1" Irrigation Water Meter	EA	1	0%	1	1.250	\$ 47.00	\$ 58.75	\$ 128.00	\$ 186.75	\$ 187
595			1" Master Valve	EA	1	0%	1	2.350	\$ 47.00	\$ 110.45	\$ 335.00	\$ 445.45	\$ 445
596			Double Check Backflow Preventer -Wilkins 350 Series -Wilkins Series Wye Filter -850 Series Bronze Ball Valve	EA	1	0%	1	4.500	\$ 47.00	\$ 211.50	\$ 989.00	\$ 1,200.50	\$ 1,201



DETAILED BREAKDOWN OF ITEMS

Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023

Scope: GC

Date: 22-Dec-24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
597			Netafim LVCZ Series Drip Valve Assembly W/PSI Regulator And 140 Mesh Filter -Model LVCZS8010075-LF For Drip Zones W/0.25-4.4 GPM -Model LVCZ10075-HFHP For Drip Zones W/4.5-17.6 GPM -Model LVCZ-150HP For Drip Zones W/11-35 GPM	EA	5	0%	5	2.120	\$ 47.00	\$ 99.64	\$ 282.86	\$ 382.50	\$ 1,913
598			Hunter PGP Ultra ARC 4" Pop Up Rotary Head W/ #4 Blue Nozzle	EA	26	0%	26	0.250	\$ 47.00	\$ 11.75	\$ 13.48	\$ 25.23	\$ 656
599			Hunter HQ-33-LRC-R Quick Coupling Valve W/Locking Purple Cover And 3/4" PVC Ball Valve	EA	6	0%	6	1.054	\$ 47.00	\$ 49.53	\$ 87.82	\$ 137.35	\$ 824
600			Hunter PGP Ultra ARC 4" Pop Up Rotary Head W#2.5 Blue Nozzle	EA	20	0%	20	0.250	\$ 47.00	\$ 11.75	\$ 13.47	\$ 25.22	\$ 504
601			Hunter ICV Series Electric Remote Control Valve	EA	15	0%	15	2.450	\$ 47.00	\$ 115.15	\$ 283.22	\$ 398.37	\$ 5,976
602			Hunter 12C-800-M Series Controller W/ICM-2200 And WRFC Wireless Rain/Freeze Sensor	EA	1	0%	1	3.290	\$ 47.00	\$ 154.63	\$ 734.69	\$ 889.32	\$ 889
603			Hunter Pros-04-PRS30 Series Spray Head W/ Pro Spray Nozzle	EA	122	0%	122	0.200	\$ 47.00	\$ 9.40	\$ 12.72	\$ 22.12	\$ 2,699
												SUBTOTAL \$	606,595
UTILITIES													
PIPING													
PIPES													
604			4" Dia PVC Storm Pipe	LF	79	10%	87	0.100	\$ 78.80	\$ 7.91	\$ 7.40	\$ 15.31	\$ 1,328
605			10" Dia HDPE Storm Pipe	LF	98	10%	108	0.251	\$ 78.80	\$ 19.78	\$ 6.25	\$ 26.03	\$ 2,806
606			22" Dia HDPE Storm Pipe	LF	177	10%	194	0.552	\$ 78.80	\$ 43.51	\$ 13.75	\$ 57.26	\$ 11,124
607			16" Dia HDPE Storm Pipe	LF	153	10%	168	0.402	\$ 78.80	\$ 31.65	\$ 10.00	\$ 41.65	\$ 7,014
608			25" Dia RC Storm Pipe	LF	148	10%	163	0.487	\$ 78.80	\$ 38.38	\$ 58.20	\$ 96.58	\$ 15,771
609			6" Dia Fire Service Lane	LF	402	10%	442	0.151	\$ 78.80	\$ 11.87	\$ 11.10	\$ 22.97	\$ 10,162
610			6" Dia PVC Sanitary Sewer Pipe	LF	293	10%	322	0.151	\$ 78.80	\$ 11.87	\$ 11.10	\$ 22.97	\$ 7,402
611			1" Dia Water Pipe	LF	239	10%	263	0.050	\$ 78.80	\$ 3.96	\$ 1.85	\$ 5.81	\$ 1,528
612			8" Dia Water Pipe	LF	110	10%	122	0.201	\$ 78.80	\$ 15.82	\$ 14.80	\$ 30.62	\$ 3,721
STRUCTURES													
INLET													
613	C0.00-IR2.01	Plan Notes	4' x 4' Type Y Storm Inlet (5' Deep) -Inlet Has 6" Thk Concrete Apron On Both Sides -Type Y Inlets Has Weir Openings On Four Sides -Minimum Opening For Type Y Inlet Is 3 Feet -All Reinforcing Shall Be #4 Bars @ 12" O.C Except In Top -At Top Reinforcing Shall Be #5 Bars @ 12" O.C	EA	3	0%	3	9.250	\$ 78.80	\$ 728.90	\$ 1,497.00	\$ 2,225.90	\$ 6,678
MANHOLE													
614			5' Dia Precast Concrete Sanitary Sewer Manhole -12" Thk 3/4" Crushed Stone -Geotextile Fabric At Bottom Of Manhole	EA	1	0%	1	16.130	\$ 78.80	\$ 1,271.04	\$ 2,623.00	\$ 3,894.04	\$ 3,894
CLEANOUT													
615			Sanitary Sewer Cleanout	EA	2	0%	2	4.750	\$ 78.80	\$ 374.30	\$ 540.00	\$ 914.30	\$ 1,829
MISC													
616			Domestic Water Meter	EA	3	0%	3	1.750	\$ 78.80	\$ 137.90	\$ 169.13	\$ 307.03	\$ 921
617			Fire Department Connection	EA	1	0%	1	5.000	\$ 78.80	\$ 394.00	\$ 200.00	\$ 594.00	\$ 594

DETAILED BREAKDOWN OF ITEMS														
		Project Name: Pinnacle Montessori School Building 1400 FM 407 Northlake, Texas 76247 Project ID: 22122023												
		Scope: GC												
		Date: 22-Dec-24												
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
618			Fire Hydrant	EA	1	0%	1	15.000	\$ 78.80	\$ 1,182.00	\$ 4,100.00	\$ 5,282.00	\$ 5,282	
619				EA	1	0%	1	0.000	\$ 78.80	\$ -	\$ -	\$ -	\$ -	
				TRENCHING										
620				Trenching	CY	67	10%	74	0.650	\$ 78.80	\$ 51.22	\$ -	\$ 51.22	\$ 3,775
621				Backfill	CY	55	0%	55	0.550	\$ 78.80	\$ 43.34	\$ -	\$ 43.34	\$ 2,384
												SUBTOTAL \$	86,213	
PROJECTED COST												\$3,050,942		
												OVERHEAD AND PROFIT	10%	\$305,094
												INSURANCE	2%	\$45,764
												CONTINGENCY	2%	\$61,019
												TAX	4.5%	\$137,292
SUGGESTED BID												\$3,600,112		
ADD ALTERNATE														
FINISHES														
	A5.0	Plan Notes	CEILING FINISHES											
			WOOD CEILING											
622			1 x 6 T & G Wood Ceiling	SF	2311	10%	2542	0.100	\$ 43.50	\$ 4.35	\$ 6.24	\$ 10.59	\$ 26,921	
												SUBTOTAL \$	26,921	
FURNISHING														
			COUNTERTOP											
623	A5.0	Plan Notes	Granite Countertop	SF	17	10%	19	0.360	\$ 54.50	\$ 19.62	\$ 83.19	\$ 102.81	\$ 1,923	
												SUBTOTAL \$	1,923	
PROJECTED COST												\$28,843		
												OVERHEAD AND PROFIT	10%	\$2,884
												INSURANCE	2%	\$433
												CONTINGENCY	2%	\$577
												TAX	4.5%	\$1,298
SUGGESTED BID												\$34,035		