


GENERAL SUMMARY				
Project Name: SAUCED'S HOUSE				
Project ID: 1005-06				
Scope: RENOVATION				
Date: 21-10-24				
BUILDING GSF		3,000		
DIVISION NO.		DESCRIPTION	TOTAL DIV. COST	TOTAL DIV. COST (PER SF)
1000	GENERAL REQUIREMENTS		\$ 15,800	\$ 5.27
6000	EXISTING CONDITION		\$ 389	\$ 0.13
8000	OPENING		\$ 3,377	\$ 1.13
9000	FINISHES		\$ 27,646	\$ 9.22
10000	FURNISHES		\$ 102,776	\$ 34.26
22000	PLUMBING		\$ 2,866	\$ 0.96
26000	ELECTRICAL		\$ 36,330	\$ 12.11
TOTAL TRADE COST			\$ 189,184	\$ 63
OVERHEAD AND PROFIT		20%	\$ 37,837	\$ 12.61
INSURANCE		5%	\$ 9,459	\$ 3.15
CONTINGENCY		5%	\$ 9,459	\$ 3.15
TAX		9.5%	\$ 17,973	\$ 5.99
SUGGESTED BID			\$ 263,912	\$ 87.97

DETAILED BREAKDOWN OF ITEMS													
			Project Name:			SACRED'S HOME							
			Project ID:			000-000							
			Scope:			RENOVATION							
			Date:			21-Oct-24							
ID #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTE	UNIT MEASUREMENT	MATERIAL	LABOR CODE	MAT. CODE	UNIT COST	NR. COST
30			W-B-B-1000 Unfinished White Oak Hardwood MFR. LL Flooring Sheet: 100X120 Finish: Unfinished Wood Stain: ST1 & SW & 3-4D	LF	943.02	10%	1037	0.000	\$ 42.00	\$ 2.09		\$ 7.02	\$ 10,366
31			W-B-W- Butler Wallpaper MFR. Sherburne Wallcovering Item #: RANF105 Size: 42" x 57" (continued) Finish: Butler White #103	SF	176	10%	194	0.007	\$ 42.00	\$ 1.51		\$ 3.21	\$ 4.74
32			Wallpaper PF-01 Size: 2'-7 1/2" x 4'-1"	EA	3	10%	3	0.003	\$ 42.00	\$ 18.22		\$ 16.71	\$ 113
33			Wallpaper PF-01 Size: 2'-7 1/2" x 4'-1"	EA	6	10%	7	0.007	\$ 42.00	\$ 29.39		\$ 29.73	\$ 241



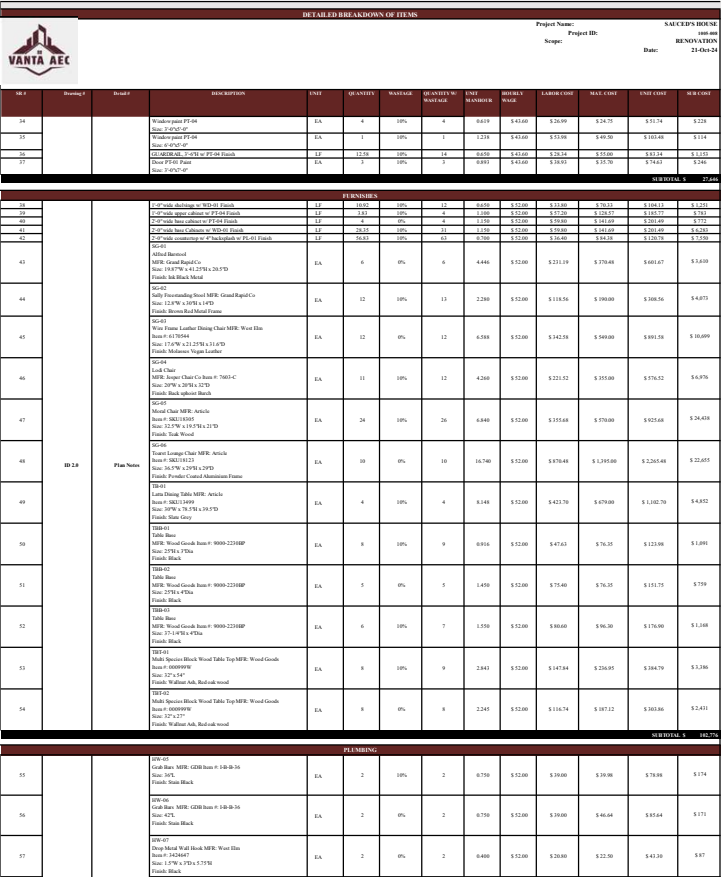

21-10-2

